

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
11 November 2004 (11.11.2004)

PCT

(10) International Publication Number  
**WO 2004/098128 A1**

- (51) International Patent Classification<sup>7</sup>: **H04L 12/28**,  
G06F 3/12
- (21) International Application Number:  
PCT/JP2004/005600 ✓
- (22) International Filing Date: 20 April 2004 (20.04.2004) ✓
- (25) Filing Language: English ✓
- (26) Publication Language: English ✓
- (30) Priority Data:  
2003-118834 23 April 2003 (23.04.2003) ✓ JP
- (71) Applicant (for all designated States except US): CANON  
KABUSHIKI KAISHA [JP/JP]; 3-30-2, Shimomaruko,  
Ohta-ku, Tokyo, 1468501 (JP).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): FUJII, Ken'ichi ✓


[JP/JP]; c/o CANON KABUSHIKI KAISHA, 3-30-2,  
Shimomaruko, Ohta-ku, Tokyo, 1468501 (JP). WATAN-  
✓ABE, Mitsuhiro [JP/JP]; c/o CANON KABUSHIKI  
KAISHA, 3-30-2, Shimomaruko, Ohta-ku, Tokyo,  
1468501 (JP). NAKAHARA, Masanori ✓[JP/JP]; c/o  
CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko,  
Ohta-ku, Tokyo, 1468501 (JP).

(74) Agent: OHTSUKA, Yasunori; Shuwa Kioicho Park Bldg.  
7th FL., 3-6, Kioicho, Chiyoda-Ku, Tokyo, 1020094 (JP).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG,  
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,  
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,  
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,  
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: WIRELESS COMMUNICATION SYSTEM, AND WIRELESS COMMUNICATION DEVICE AND CONTROL  
METHOD ✓

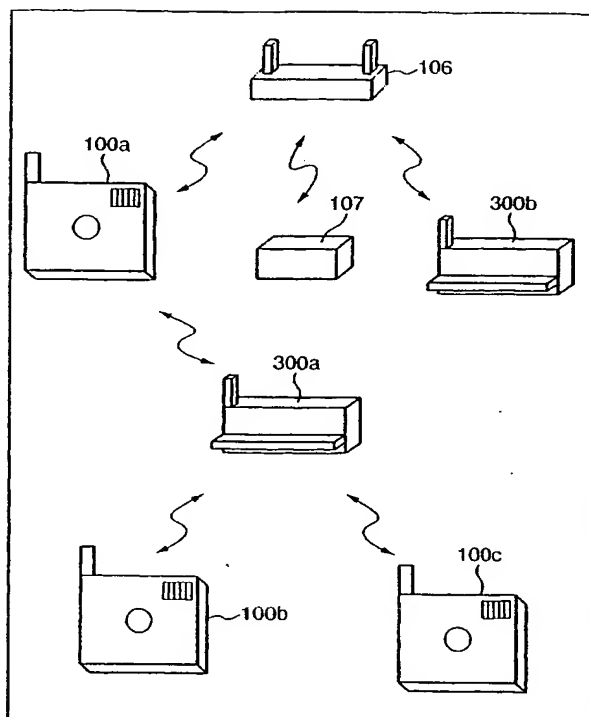

(57) Abstract: This invention has as its object to es-  
tablish a wireless communication between wireless  
communication devices and to provide a desired ser-  
vice without any troublesome setup operations. To  
this end, a digital camera and printer of this inven-  
tion have wireless communication functions. When  
it is determined that a wireless communication in-  
struction is issued by a console of the digital camera,  
a beacon from a network is detected. Upon detec-  
tion of the beacon, search request information used  
to confirm the presence of a wireless communication  
processing device on a network identified by network  
identification information included in the beacon is  
transmitted in accordance with that network iden-  
tification information. If response information to this  
transmitted request information is detected, identifi-  
cation information of a partner wireless communica-  
tion device included in the response information is  
stored, and is displayed to allow the user to select a  
connection target device.



(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**Published:**

— with international search report

## DESCRIPTION

WIRELESS COMMUNICATION SYSTEM, AND WIRELESS  
COMMUNICATION DEVICE AND CONTROL METHOD

## 5 TECHNICAL FIELD

The present invention relates to a communication establishment technique between devices having wireless communication functions.

## 10 BACKGROUND ART

Normally, a host computer as a versatile information processing apparatus such as a personal computer or the like and a printer are connected by wire. Such wired connection adopts a USB cable, parallel cable (complying with the Centronics standards (USA)), Ethernet®, and the like.

In recent years, digital cameras have prevailed increasingly, and the recording quality of printers has improved as high as silver halide photos. Hence, there are many chances of printing images sensed by such digital camera by printers.

In order to print an image sensed by a digital camera, it is a common practice to transfer that image to a personal computer, and to print it by operating an application program that runs on the personal computer.

However, a digital camera user requires a personal computer when he or she wants to print sensed

images, and much time and labor are required from when the user turns on the personal computer until he or she launches an application to print an image. Hence, such processes are far from an easy print process.

5           In consideration of such situation, the present applicant has proposed some techniques that directly connect a printer and digital camera by wire.

          However, since such wired connection requires a connection cable as a matter of course, a demand has  
10   arisen for wireless information transmission, and wireless communications have begun to be used in communications between peripheral devices (e.g., printer - digital camera).

          Hence, the current connection method of wireless  
15   communication devices between peripheral devices will be explained first.

          Fig. 17 is a flow chart showing the conventional method upon searching for a printer to which data is to be transmitted from a digital camera when the adhoc  
20   mode of a wireless LAN is used as wireless communication means. Fig. 17 shows a flow chart executed when a new digital camera is brought into an existing wireless LAN communication system in the adhoc mode, and establishes connection to the printer.

25           Referring to Fig. 17, when the digital camera is connected to the printer in the adhoc mode, an ESSID (Extend Service Set Identify) is set in the digital

- 3 -

camera (step S2501), a channel used in a wireless communication is set (step S2502), the adhoc mode as a wireless communication mode is set (step S2503), and devices on the wireless network are searched (step  
5 S2504). Then, the user selects a printer to be used in a print process from the devices on the wireless network (step S2505), thus establishing a communication channel.

However, in such prior art, in order to establish  
10 a wireless communication between wireless devices, parameters for the wireless communication must be set in respective wireless communication devices, and the user must select a desired partner device to communicate with from device names presented on the  
15 network. Hence, a wireless communication cannot be established unless the user makes complicated setup operations. Also, in case of wireless communication devices having a plurality of communication modes, a communication mode used to establish connection with a  
20 partner device must be taken into consideration, and knowledge about networks on some level is required. Therefore, such process is not for everyone.

#### DISCLOSURE OF INVENTION

25 The present invention has been made in consideration of the above situation, and has as its object to provide a wireless communication device which

- 4 -

can establish a wireless communication between wireless communication devices and can provide a desired service without any complicated setup operations.

It is another object of the present invention to  
5 provide a wireless communication device which can establish wireless connection regardless of any communication mode.

In order to achieve such objects, for example,  
network identification information used at each  
10 frequency is detected by scanning beacons at respective frequencies, and a wireless communication device having a desired function is searched for using this network identification information. If the wireless communication device having a desired function is found,  
15 that wireless communication device is displayed as a selectable candidate, thus allowing the operator to select that device. These processes are repeated while sequentially changing the frequency until the operator's selection is made, thereby finding out a  
20 wireless communication device desired by the operator.

Also, by changing a search method depending on whether the received beacon is that in an adhoc communication mode or infrastructure communication mode, the operator can find a desired wireless communication  
25 device irrespective of a communication mode upon making a search.

- 5 -

Information associated with connection of a wireless communication device, the wireless communication to which has been established is stored, and is allowed to be re-used, thus saving time and labor when a communication is to be made again with the wireless communication device which has been communicated.

Upon searching for a new partner, wireless communication devices other than partners which have been communicated are searched, and a new partner can be quickly found out.

A wireless communication device that transmits an informing signal such as a beacon or the like appends device information of the self device to the informing signal upon transmission. A wireless communication device which is searching for a desired partner identifies the presence of a wireless communication device with a desired function on the basis of device information included in the received informing signal, and displays it as a selectable candidate, thus allowing an easy search of a communication partner.

Other features and advantages of the present invention will be apparent from the following description taken in conjunction with the accompanying drawings, in which like reference characters designate the same or similar parts throughout the figures thereof.

## BRIEF DESCRIPTION OF DRAWINGS

Fig. 1 is a block diagram showing the overall wireless communication system which comprises wireless communication devices according to an embodiment of the present invention;

Fig. 2 is a block diagram showing the arrangement of a digital camera according to an embodiment of the present invention;

Fig. 3 is a block diagram showing the arrangement of a printer according to an embodiment of the present invention;

Fig. 4 is a block diagram showing the arrangement of a storage device according to an embodiment of the present invention;

Figs. 5A to 5C are flow charts showing the operation of the digital camera according to the first embodiment of the present invention;

Figs. 6A and 6B are flow charts showing the processing sequence of the printer according to the first embodiment of the present invention;

Fig. 7 is a flow chart showing the processing sequence of the digital camera according to the first embodiment of the present invention;

Fig. 8 is a flow chart showing the processing sequence of the digital camera according to the first embodiment of the present invention;



Fig. 9 is a flow chart showing the processing sequence of the digital camera according to the first embodiment of the present invention;

5 Figs. 10A to 10C are flow charts showing the processing sequence of the digital camera according to the second embodiment of the present invention;

Fig. 11 is a flow chart showing the processing sequence of the digital camera according to the first embodiment of the present invention;

10 Fig. 12 is a flow chart showing the processing sequence of the digital camera according to the third embodiment of the present invention;

Fig. 13 is a flow chart showing the processing sequence of the printer according to the third  
15 embodiment of the present invention;

Fig. 14 shows the data format of network identification information according to the fourth embodiment of the present invention;

Fig. 15 is a flow chart showing the processing  
20 sequence of the printer according to the fourth embodiment of the present invention;

Fig. 16 is a flow chart showing the processing sequence of the digital camera according to the fourth embodiment of the present invention; and

25 Fig. 17 is a flow chart showing the control of a conventional wireless communication device.

## BEST MODE FOR CARRYING OUT THE INVENTION

Respective embodiments according to the present invention will be described hereinafter with reference to the accompanying drawings. Note that a description  
5 about connection of network devices (a digital camera, printer, storage, and the like) will be given hereinafter. A print process and a designation & transmission process of an image to be saved on the digital camera side, a reception & print process and  
10 the like on the printer side are the same as those to be executed upon wired connection, and a description thereof will be omitted.

## &lt;First Embodiment&gt;

The first embodiment will explain a case wherein  
15 a device search is conducted for all frequencies that can be received in an environment without any network setups.

Fig. 1 is a block diagram showing the overall arrangement of a wireless communication system in this  
20 embodiment.

Referring to Fig. 1, reference numerals 100a to 100c denote digital cameras which serve as communication devices on the information transmitting side having wireless communication means. Reference  
25 numerals 300a and 300b denote printers which serve as communication devices on the information receiving side having wireless communication means. Reference numeral

- 9 -

107 denotes a storage device which serves as a communication device on the information receiving side having wireless communication means.

The digital cameras 100a to 100c can make data communications using the wireless communication means among themselves or with the printers 300a and 300b and the storage device 107 via an access point 106 or directly.

Note that each printer is a device for printing image data transmitted from the digital camera, and the storage device is used to save (store) image data transmitted from the digital camera as a file.

Fig. 2 is a functional block diagram showing the functional blocks of a digital camera 200 (corresponding to 100a to 100c in Fig. 1). A console 210 of the digital camera is connected to a CPU controller 216 via a system controller 211, and comprises a shutter and various operation switches and buttons of the digital camera. An image sensing unit 202 is a block that senses an image upon depression of the shutter, and is processed by an image sensing processor 203. A display unit 206 is a block that presents information to the user by means of, e.g., LCD display, LED indication, audio presentation, and the like, and is processed by a display processor 207. Note that the console 210 and display unit 206 form a user interface of the digital camera.

A wireless communication function unit (IEEE802.11 in this embodiment) 204 is a block that makes wireless communications, and an RF unit 205 exchanges a wireless signal with another wireless communication device. A memory card I/F 208 is an interface used to connect a memory card 209, a USB I/F 212 is an interface used to connect an external device using USB, and an audio I/F 214 is an interface used to connect an audio signal with an external device. These functional blocks shown in this block diagram are processed under the control of the CPU 216. Programs to be controlled by the CPU are stored in a ROM 215 or flash ROM 213. Data to be processed by the CPU are written in or read out from a RAM 217, the flash ROM 213, or the memory card 209 via the memory card I/F 208.

Fig. 3 is a functional block diagram showing functional blocks of a printer 300 (300a or 300b shown in Fig. 1).

A console 310 of the printer is connected to a CPU controller 316 via a system controller 311, and includes a button used to establish a communication channel used in this embodiment and the like. A print engine 302 is a functional block which actually prints an image on a paper sheet, and is processed by a print processor 303. A paper feed unit 318 feeds a paper sheet, the print processor 303 executes a data print process, and an exhaust unit 319 exhausts the paper

- 11 -

sheet. A display unit 306 is a block which presents information to the user by means of LCD display, LED indication, audio presentation, and the like, and is processed by a display processor 307. The console 310  
5 and display unit 306 form a user interface of the printer.

A wireless communication function unit (IEEE802.11 in this embodiment) 304 is a block that makes wireless communications, and an RF unit 305  
10 exchanges a wireless signal with another wireless communication device. A memory card I/F 308 is an interface used to connect a memory card 309, a USB I/F 312 is an interface used to connect an external device using USB, and a parallel I/F 314 is an interface used  
15 to connect an external device (e.g., a personal computer or the like) using a parallel communication. These functional blocks shown in this block diagram are processed under the control of the CPU 316. Programs to be controlled by the CPU are stored in a ROM 315 or  
20 flash ROM 313. Data to be processed by the CPU are written in or read out from a RAM 317, the flash ROM 313, or the memory card 309 via the memory card I/F 308.

Fig. 4 is a functional block diagram showing the functional blocks of a storage device 400  
25 (corresponding to the storage device 107 in Fig. 1) in this embodiment.

- 12 -

A console 410 of the storage device 400 is connected to a CPU controller 416 via a system controller 411. A storage 402 is a functional block that stores or reads out data, and is processed by a storage processor 403. As the storage 402, a large-capacity storage device, i.e., a hard disk drive, is preferably used. In some cases, a media write drive for CD-R or CD-RW media, rewritable DVD media, MO media, and the like as relatively large-capacity, portable storage media may be used. A display unit 406 is a block which presents information to the user by means of LCD display, LED indication, audio presentation, and the like, and is processed by a display processor 407. An operation for selecting desired one of information displayed on the display unit 406 is made via the console 410. The console 410 and display unit 406 form a user I/F of the storage device 400.

A wireless communication function unit (IEEE802.11 in this embodiment) 404 is a block that makes wireless communications, and an RF unit 405 exchanges a wireless signal with another wireless communication device. A memory card I/F 408 is an interface used to connect a memory card 409 (to receive a memory card of the digital camera and to directly save data in that card), a USB I/F 412 is an interface used to connect an external device using USB, and an ETHER I/F 414 is an interface used to connect an

- 13 -

external device using an ETHER communication. These functional blocks shown in this block diagram are processed under the control of the CPU 416. Programs to be controlled by the CPU are stored in a ROM 415 or  
5 flash ROM 413. Data to be processed by the CPU 416 are written in or read out from a RAM 417 or the flash ROM 413. The flash ROM 413 is a nonvolatile storage area, which stores wireless communication setup information and the like.

10 In the arrangements of the aforementioned devices, processes for printing images sensed by the digital camera using the printer and saving (storing) such images in the storage device are implemented via wireless communications.

15 The detailed operations of the devices in this embodiment will be described below.

Figs. 5A to 5C are flow charts showing the control of the digital camera 200 of this embodiment.

In the following description, assume that the  
20 process shown in Figs. 5A to 5C is done by the digital camera 200 for the sake of simplicity.

Assume that the user has selected the use of the printer 300 at the digital camera. Although not specified in Figs. 5A to 5C, the digital camera 200 may  
25 have a user interface that allows the user to select a print mode.

- 14 -

Since the frequency or the like of the printer location is unknown upon searching for the printer 300, a frequency as an initial value is set in f, and 0 (zero) is set in variable n that stores the number of pieces of stored device identification information (step S501). A search request is sent to the wireless communication function unit 204 (step S502). The digital camera 200 repeats the following process as a search process.

10        It is checked if the search process is complete for all receivable frequencies (step S504). If frequencies to be received still remain, it is checked if the user has made a device selection process (step S505). If the user has not made a device selection  
15        process, it is then checked if the user has made a search abort process (step S506). If the user has not made a search abort process, Beacon signals are scanned and received for a predetermined period of time to acquire and collect SS-IDs and network identification  
20        information from the Beacon signals transmitted at the current frequency (step S507). Although not specified herein, passive and active scan modes are available as a scan reception mode. In case of the active scan mode, a Probe signal is output to receive a Beacon as a  
25        response. Upon completion of scan reception of the Beacons, a wireless establishment request to the network is transmitted in accordance with each



- 15 -

collected SS-ID and network identification information (step S508). If wireless connection is OK (step S509), a device search request used to search for a wireless device with a desired function (e.g., a print function, storage function, or the like) is broadcasted (step 5 S510). On the other hand, if wireless connection is NG, Beacon signals are received again (step S507).

Upon reception of a response to the device search request (step S511), device information and network 10 identification information successively received as a response, and a frequency (channel) at that time are stored in the RAM 217 as a storage area (step S512).

Next, the stored device information is displayed (step S513). The frequency is changed (step S514) to 15 repeat processes in steps S508 to S513 for all the collected SS-IDs and network identification information. If such repetitive processes are complete for all the frequencies (step S504), and if the number of pieces of stored device identification information is not 0 20 (zero) (step S527), a list of stored device information is displayed (step S528), and it is checked if the user has selected a device from the displayed list (step S529). If the user has selected a device, the flow advances to step S520; if selection has not been made 25 for a predetermined period of time, the flow ends. On the other hand, if the user has made the device selection process during the repetitive processes in

- 16 -

step S505, the flow advances to step S520. When the selection process has been made in step S505 or S529, if the device search process is in progress (step S520), the device search process is aborted (step S521). Then,  
5 network identification information is set for the selected device, and a wireless communication establishment request is transmitted (step S522). If wireless connection has succeeded (step S523), an image selection window used to select an image to be  
10 transmitted is displayed and a setup process (a setup process of the number of copies to be printed, print type, and the like) is made (step S524). Furthermore, a print job request based on the above setup is transmitted (step S525). On the other hand, if  
15 wireless connection has failed, a connection failure display is made (step S526).

The operation of the printer 300 will be described in detail below using Figs. 6A and 6B.

In the printer, upon reception of an image data  
20 wireless reception instruction from the digital camera, it is checked if the wireless communication mode of the self device is an adhoc mode as direct connection (step S601) or an infrastructure mode that makes a communication via the access point 106 (step S605). If  
25 the printer operates in the adhoc mode, frequency  $f$  is set (step S602), network identification information is set (step S603), and Beacon transmission starts (step

- 17 -

S604). On the other hand, in case of the infrastructure mode, frequency  $f$  is set (step S606), network identification information is set (step S607), and an associate process is executed (step S608). The control waits until the associate process with the access point 106 is completed (step S609). If the current wireless communication mode is neither the adhoc mode nor the infrastructure mode, a default wireless communication mode is set (step S615) to redo a communication process from the beginning.

After the process routine for either of the two modes, it is checked if a search request is detected (step S610). If the search request is detected, a device information response which includes the ID of the self device, printer name, serial number, vendor code, and the like is transmitted (step S611). The control then waits for a print job request (step S612). Upon reception of the print job request, data designated by that print job request is acquired and printed, and a status notification process that notifies of job progress status is executed (step S613). The control waits until the print job is completed (step S614).

Note that the processes of the digital camera and printer have been explained. Also, the same applies to processes between the digital camera and storage device, i.e., a case wherein image data sensed by the digital

- 18 -

camera is wirelessly received, and is saved (stored) as a file. The processes of the storage device can be substantially the same as those shown in Figs. 6A and 6B, except that it is checked in step S612 in Fig. 6B  
5 if a save request is detected, the data acquisition/save/status notification processes are made in step S613, and it is checked in step S614 if a save job is completed.

When the digital camera and printer (or storage)  
10 execute the aforementioned processes, the digital camera user need only issue a wireless communication establishment instruction. Hence, the location of a wireless LAN is detected by receiving Beacon signals, and parameters required for a wireless communication at  
15 that time are automatically set to search for a device, thus simplifying the setup process required for the wireless communication. Every time a device is found, identification information of that device is displayed on the display unit 206. If a target device is  
20 displayed, the user can select that device to abort the subsequent search process, and can immediately make a transmission procedure of a sensed image.

A process for setting the adhoc mode as direct connection or the infrastructure mode that makes a  
25 communication via the access point 106 as the wireless communication mode used upon searching for device information by the digital camera 200 without any

special operation will be explained below with reference to the flow chart of Fig. 11.

Upon detection of the operation of a wireless connection instruction button (not shown) on the user interface of the digital camera 200, a search timer used in a device search process is started (step S1100). The following processes are repeated until either of the following two conditions is met, i.e., until the search timer reaches a time-out (step S1101) or search processes for all the frequencies are completed (step S1102).

An attempt is made to detect a Beacon (step S1103). Since the digital camera 200 can identify based on the signal contents if the Beacon signal has come from a station or access point) (steps S1105 and S1106), if the Beacon signal has come from the station, wireless connection is established to receive an assigned IP address (step S1109), and a device search broadcast request is set and transmitted to the partner station (printer or storage) (step S1110). If a response is detected (step S1111), device information included in the response contents is displayed, and is stored in the flash ROM 213 as a nonvolatile memory (step S1112). On the other hand, if the Beacon signal has come from the access point, an associate process with the access point is executed to receive an assigned IP address (step S1107), and a device search

- 20 -

broadcast request is set and transmitted to the access point (step S1108). If a response to that request is detected, device information included in the response contents is displayed, and is stored in the flash ROM 213 as a nonvolatile memory in step S1112. After that, the frequency is changed (step S1113) to repeat the processes in step S1101 and subsequent steps until the search timer reaches a time-out or search processes for all the frequency are completed.

10 Detailed processes executed when the digital camera 200 acquires device information will be described below with reference to the flow charts of Figs. 7, 8, and 9.

Fig. 7 shows processes (a part of the process in step S1112 in Fig. 11) executed when the acquired device information is stored in a nonvolatile memory (flash ROM in this embodiment). Since the capacity of the nonvolatile memory is limited, the number  $m$  of pieces of device information currently stored in the nonvolatile memory is checked (step S700). Next, the maximum number  $n$  of pieces of device information that can be stored in the nonvolatile memory is set as MAXMEM (step S701). It is checked if  $m \leq n$ , i.e., if another device information can be stored (step S702).

25 If another device information can be stored, device information which is acquired by the device search request and is stored in a device information storage

- 21 -

area is written in the flash ROM 213 (step S703). Then,  
m indicating the number of pieces of currently stored  
device information is incremented by 1 (step S704) to  
repeat these process until m reaches n. If the maximum  
5 number of pieces of device information that can be  
stored has been reached (step S705), information "full  
of device information" is displayed as a warning  
message (step S706), thus ending the process.

Fig. 8 shows processes executed when it is  
10 checked if a communication has succeeded, and only  
device information corresponding to the successful  
communication is stored in the flash ROM upon storing  
the acquired device information in the nonvolatile  
memory (flash ROM 213). The contents of the device  
15 information storage area are read out (step S800). The  
device information storage area stores information  
indicating if a communication has succeeded to form a  
pair with the device information. If the device  
information corresponds to that of a successful  
20 communication device (step S801), the contents of the  
device information storage area are written in the  
flash ROM 213 as a nonvolatile memory (step S802).

Fig. 9 shows an example when means that prompts  
the user to select whether or not the device  
25 information of the wireless communication device of  
interest is registered is provided after a  
communication. Upon completion of a communication

(S900), a window that prompts the user to select whether or not the device information of interest is to be registered is displayed (S901). If the user selects registration, the contents of the device information storage area are read out (S902), and are written in the nonvolatile memory (S903).

In this way, after device information is searched, such information is stored as history information, thus designating a device to be connected within a short period of time upon making a second search process. Also, since the user can select whether or not device information is to be registered after completion of a communication, he or she can make selection of non-registration when that device is to be temporarily used in the flow of a series of communication processes, thus improving the operability. Hence, an effect unique to this embodiment can be provided.

In the above description, the flash ROM has been exemplified as nonvolatile storage means (nonvolatile memory). Also, the same result can be obtained if information is stored in the memory card 209.

#### <Second Embodiment>

The second embodiment of the present invention will be described below. In the second embodiment, the detailed operation of the digital camera 200 which has a history search mode that searches history for a device to communicate with (without any wireless



- 23 -

communication for the search process in practice), and a new search mode that searches for a new device will be described below using the flow chart of Figs. 10A to 10C.

5           Upon operation of a device search instruction button (one of history search and new search buttons) of the digital camera, the number m of pieces of already stored history information (device identification information, SSIDs, and the like) is set,  
10 counter i indicating an index of a device information table stored in a history information storage area is reset to 0 (zero), and history information such as identification information, SSID at that time, and the like of each previously connected device (printer or  
15 storage), which is stored in the flash ROM 213, is stored in an area assured in the RAM 217. At this time, the power supply of the wireless communication function unit 204 is OFF.

          Assume that a new search mode is selected as a  
20 search mode (step S1001). In case of the new search mode, the power supply of the wireless unit is immediately turned on, and a timer that measures a search time is started (step S1002). If a Beacon is detected during the search process (step S1003), it is  
25 compared if the history information stored in the history information area matches network identification

information (SSID) of the detected Beacon (steps S1004, S1005, S1006, and S1007).

In is checked in steps S1004 to S1006 if history information stored in the history information area  
5 matches network identification information indicated by the Beacon detected in step S1003. If  $i \geq m$ , it is determined that new connection must be established to a network indicated by the currently detected Beacon. In step S1009, a device search request is broadcasted via  
10 that network, and device identification information and network identification information detected at that time are stored in the history information area and are also registered in the flash ROM 213. In this case,  $m$  is incremented by 1. Then, that device identification  
15 information is displayed (step S1010).

If network identification information that matches the stored one is found, since it indicates that the detected network identification information has already been stored as history information,  
20 variable  $i$  is reset to 0 in step S1007, and next new network identification information is set, thus repeating a search process for information that does not match history information.

In this way, the device search process is  
25 repeated until the timer reaches a time-out.

If it is determined that the timer has reached a time-out, it is checked if one or more devices can be

- 25 -

found by search (step S1020). If no device is found, an error message that advises accordingly is displayed (step S1021), and the power supply of the wireless unit is turned off (step S1022), thus ending this process.

5           If it is determined that one or more devices are found, the flow advances to step S1023, and the user interface of the digital camera displays a list of device information and prompts the user to select one device from the list. It is checked in step S1024 if a  
10 communication is established to the selected device (step S1024). If connection is NG, the flow advances to step S1021. On the other hand, if it is determined that a wireless communication can be established, an output process of required image data is executed for  
15 that device (printer or storage) (step S1025). Upon completion of output of a desired image (or a plurality of images), the flow advances to step S1022 to turn off the power supply of the wireless unit.

          On the other hand, if it is determined in step  
20 S1001 that the history search mode is selected, the following process is executed.

          Index i to the history table is set to be an initial value (step S1011) to repeat the subsequent processes until a device selection process is done (yes  
25 in step S1014) or the process is to end (abort process; yes in S1016).

History information area[i] is set to be the current device identification information, and that information is displayed on the display unit 206 (steps S1012 and S1013). The user can select that displayed  
5 device (step S1014), "end" (step S1016), or to display the next device (step S1017). If the displayed device is selected, the power supply of the wireless communication function unit 204 is turned on (step S1015). The flow then advances to step S1024 to try to  
10 establish connection using the identification information and SSID of the selected device. The subsequent processes are the same as those described above.

If the user selects "end" (S1016), the flow  
15 advances to step S1021 to display an error message indicating an abort process.

Steps S1018 and S1019 are processes for switching device information to be displayed. In this case, device information to be displayed is switched by  
20 pressing one of right and left keys. Of course, the present invention is not limited to such specific operation.

In this manner, since the new search mode and history search mode are provided upon searching for  
25 device information, power ON/OFF of the wireless unit can be flexibly controlled in accordance with the selected mode, and the power supply of the wireless

- 27 -

unit is turned on only when a wireless communication is required, thus expecting to obtain a power saving effect in addition to the first embodiment.

When the new search mode is selected in Figs. 10A  
5 to 10C, the same processes as in the first embodiment may be executed.

Also, since the processes shown in Figs. 6A and 6B need only be executed as those on the printer or storage side, a description thereof will be omitted.

10 <Third Embodiment>

The third embodiment will be described below.  
The third embodiment will explain a case wherein identical network identification information (SSID) is set in both the two wireless communication devices,  
15 i.e., the digital camera 200 and printer 300.

The operation of the digital camera 200 in this embodiment will be described first with reference to the flow chart of Fig. 12.

Upon detection of an operation of a predetermined  
20 button that instructs to start a wireless communication process, it is checked if network identification information has already been set and registered in the flash ROM (step S1200). If no network identification information is set, a warning message "network setup  
25 information is not available" or the like is displayed (step S1203), thus ending this process.

- 28 -

If it is determined that network identification information has already been set and registered, it is checked if the communication mode of the set information is an adhoc mode (step S1201). If the communication mode of the set data is an adhoc mode, a search timer is started, and a Beacon whose network identification information matches is detected (step S1205) until the search timer reaches a time-out (step S1204). If the timer has reached a time-out and no such Beacon is detected, it is determined that the wireless unit of a communication partner is OFF, and an error message "check the power supply of the partner device" or the like is displayed (step S1206). If a plurality of devices that transmit an identical Beacon is found upon detecting the Beacon (step S1207), a device search request is transmitted to these devices (step S1208). If a device information response is detected (step S1209), device information in that response is displayed (step S1210). The user selects a device to which he or she wants to establish connection from the displayed device information list (step S1212), thus establishing wireless connection and a communication channel (step S1213). On the other hand, if no device information response is detected, a warning message "partner device is BUSY/incompatible function" is displayed (step S1211). Furthermore, if only one device is found (step S1207), wireless

connection and a communication channel are established (step S1213).

The operation of the printer 300 in the third embodiment will be described below with reference to the flow chart of Fig. 13.

When the power supply of the printer is turned on (step S1300), it is determined by checking the flash ROM 313 if network identification information has already been set (step S1301). If no network identification information is set, an error message "network setup information is not available" or the like is displayed (step S1305), thus ending this process.

If the set information is available, the power supply of the wireless communication unit 304 is turned on (step S1302), and it is confirmed if the communication mode of the set information is an adhoc mode (step S1303). If the communication mode is an adhoc mode, transmission of a Beacon (informing signal) is started (step S1304), and the control waits for reception of a device search request (step S1306). Upon reception of the device search request, a device search response is transmitted (step S1307). The control then waits for a connection request (step S1308), and a wireless communication channel is established and a data communication is made in

- 30 -

accordance with the received connection request (step S1039). A print process is executed in this step S1309.

Note that the processes of the printer have been exemplified, and the same applies to the storage device.

5       As described above, according to the third embodiment, a common network connection setup is made in at least both the digital camera and printer, and network connection is established with a device which matches the commonly set network information, thus  
10       easily building a situation that allows digital camera - printer communications. Note that the user can change the operation mode and the like upon giving instruction information.

      Also, this embodiment is effective when the above  
15       information is set as default values at the factory upon manufacturing the products of the digital camera 200 and printer 300, so as to obviate the need for user's troublesome network setup operations and to eliminate setup errors in practice.

20       When a digital camera - printer wireless communication start instruction is input as in the above example, both the devices are preferably set in the adhoc mode. This is because the printer described in this embodiment is ready to receive print data from,  
25       e.g., a host computer in a normal state, and the infrastructure mode is normally set as the wireless communication mode. That is, since the printer is



normally set in the infrastructure mode, a one-to-one communication situation is more likely to be obtained by setting the adhoc mode, thus quickly establishing a communication between these devices.

5 <Fourth Embodiment>

The fourth embodiment of the present invention will be described below. The fourth embodiment will exemplify a case wherein the time required for the device search process is shortened and a connection  
10 target range is narrowed down by setting the type of device to communicate with in network identification information.

Fig. 14 shows network identification information of this embodiment, Fig. 15 shows the processing  
15 sequence of the printer 300 of the fourth embodiment, and Fig. 16 shows the processing sequence of the digital camera 200 of the fourth embodiment.

The network identification information shown in Fig. 14 will be described first. The network  
20 identification information consists of an M-bit predetermined value field (FIXED) and an N-bit field that can be used freely. In this embodiment, DeviceInformation (device class information) is assigned to respective bits of that freely usable N-bit  
25 field. Fig. 14 shows a case wherein the N-bit field contains bit information indicating a FAX/display/storage/camera/printer.

The operation of the printer 300 will be described below with reference to Fig. 15.

The printer 300 reads out device information (step S1500). Since the self device is a printer, "1" is set in a bit indicating a printer in DeviceInformation shown in Fig. 14 (steps S1501 and S1502). Then, a Beacon that contains this DeviceInformation and a network identifier is transmitted (step S1503), and the control waits for reception of a device information search request (step S1504). Upon reception of the search request, the flow advances to step S1307 in Fig. 13.

The operation of the digital camera 200 will be described below with reference to Fig. 16.

It is checked if an output destination required to execute a process that the user designates via the user interface of the digital camera is a printer or storage (steps S1600 and S1601). According to this instruction, a printer bit or storage bit is set as search device information (step S1602 or S1603).

An informing signal is received for a predetermined period of time, and device information (DeviceInformation field) of network identification information in that signal is checked. In this case, it is checked if the bit information previously set as the search device information matches this device information (step S1605). If matched devices are found,

a list of such devices is selectably displayed (step S1606). After that, the user selects one device from the list, and wireless connection is established in practice.

5           In this way, since the type of partner device (printer/camera/storage/display/FAX) can be identified at the time of reception of network identification information before establishing wireless connection, a device search process can be conducted for only devices  
10   having a function selected by the user from a function menu (print/save/display, etc.). Hence, time required until a desired device is found can be shortened.

<Other Embodiments>

          In the above embodiments, the wireless LAN (e.g.,  
15   IEEE802.11a/b/g/h, etc.) has been exemplified as a wireless communication. Also, the present invention can be similarly applied to other wireless communication protocols (Bluetooth, UWB (Ultra Wide Band), and the like), and the wireless unit is not  
20   particularly limited.

          In the above embodiments, the digital camera outputs an image to the printer, which prints that image, and the digital camera outputs an image to the storage, which stores that image. Also, the  
25   aforementioned technique can be applied when an image stored in a given digital camera is to be stored in another digital camera, when an image stored in the

- 34 -

storage is output to the printer to print it out, and so forth. In this case, the processes explained in the above embodiments can be executed as those of the transmitting and receiving devices.

5           As described above, according to the embodiments of the present invention, even a novice user can establish a communication between wireless communication devices and can enjoy a desired service by setting information required for a wireless  
10 communication irrespective of a user's instruction without any user's troublesome setup operations upon connecting the wireless communication devices via a wireless communication.

          As described above, according to the embodiments  
15 of the present invention, a wireless communication between wireless communication devices can be established, and a desired service can be provided without any troublesome setup operations.

          As many apparently widely different embodiments  
20 of the present invention can be made without departing from the spirit and scope thereof, it is to be understood that the invention is not limited to the specific embodiments thereof except as defined in the claims.

25

- 35 -

## CLAIMS

1. A wireless communication system having first  
and second wireless communication devices, wherein  
said first wireless communication device

5 comprises:

detection means for detecting a beacon at each  
frequency;

search means for searching for a wireless  
communication device which has a predetermined function,  
10 and is present on a network identified by network  
identification information contained in the beacon  
detected by said detection means, in accordance with  
the network identification information; and

display means for selectably displaying  
15 information associated with the wireless communication  
device detected by said search means so as to determine  
a wireless communication partner,

said second wireless communication device  
comprises:

20 transmission means for, when search request  
information is detected in a wireless reception waiting  
state at a predetermined frequency, transmitting  
information including self identification information  
as response information, and

25 when information of said second wireless  
communication device displayed by said display means is  
selected, a process for establishing a communication

- 36 -

between said first and second wireless communication devices is executed.

2. A wireless communication device comprising:  
detection means for detecting a beacon at each  
5 frequency;

search means for searching for a wireless communication device which has a predetermined function, and is present on a network identified by network identification information contained in the beacon  
10 detected by said detection means, in accordance with the network identification information; and

display means for selectably displaying information associated with the wireless communication device detected by said search means so as to determine  
15 a wireless communication partner.

3. The device according to claim 2, wherein said search means transmits search request information in accordance with the network identification information included in the beacon detected by said detection means  
20 so as to search for the wireless communication device having the predetermined function, and stores in a memory identification information of a wireless communication device on a partner side included in a response to the search request information upon  
25 reception of the response, and

said display means selectably displays the identification information stored in the memory.

- 37 -

4. The device according to claim 2, wherein each of the wireless communication device and the partner wireless communication device comprises one of an image sensing device, a device for executing a print process  
5 of a sensed image, and a storage device for executing a storage process of a sensed image.

5. The device according to claim 2, wherein when one of information displayed by said display means is selected before beacons for all frequencies are  
10 detected, subsequent detection processes are aborted, and a connection process with a wireless communication device specified by the selected information is executed.

6. The device according to claim 2, wherein when  
15 no partner wireless communication device is found within a predetermined period of time, an error display is made.

7. The device according to claim 2, further comprising:  
20 determination means for determining if the beacon detected by said detection means is a beacon in an adhoc communication mode or a beacon in an infrastructure communication mode, and

in that when said determination means determines  
25 that the detected beacon is the beacon in the adhoc communication mode, said search means transmits search request information toward a wireless communication

- 38 -

processing device as a generation source of that beacon,  
and

when said determination means determines that the  
detected beacon is the beacon in the infrastructure  
5 mode, said search means transmits search request  
information of a wireless communication processing  
device toward an access point.

8. The device according to claim 2, further  
comprising registration means for registering, in a  
10 memory, information associated with connection to the  
partner wireless communication device, to which the  
wireless communication has been established.

9. The device according to claim 8, further  
comprising a mode for executing a process for  
15 establishing a wireless communication on the basis of  
the information registered by said registration means.

10. A wireless communication device comprising:  
storage means for storing device identification  
information and network identification information of a  
20 partner to which the self wireless communication device  
has been connected previously;

instruction means for instructing one of a  
history search mode that communicates with a desired  
partner wireless communication device stored in said  
25 storage means, and a new search mode that searches for  
a partner wireless communication device via a wireless



- 39 -

communication, and communicates with the found partner wireless communication device;

beacon detection means for, when said instruction means instructs the new search mode, detecting a

5 beacon;

search means for comparing network identification information included in the detected beacon with the network identification information stored in said storage means, making said detection means detect

10 another beacon if the two pieces of network identification information match, and searching for a partner wireless communication device to communicate with based on new network identification information if the new network identification information is detected;

15 first display means for selectably displaying one device identification information found by said search means;

second display means for, when said instruction means instructs the history search mode, selectably  
20 displaying the device identification information stored in said storage means; and

wireless communication establishment process means for, when one device identification information displayed by one of said first and second display means  
25 is selected, executing a wireless communication establishment process on the basis of the selected device identification information.

11. A wireless communication system having first and second wireless communication devices, wherein said first wireless communication device comprises:

5       determination means for determining a designated process type; and

      display means for displaying information associated with a device having a function of the process type determined by said determination means on  
10   the basis of signals informed by another devices,

      said second wireless communication device comprises:

      informing means for informing of device identification information indicating a self function,  
15   and

      when information of said second wireless communication device displayed by said display means is selected, a process for establishing a communication between said first and second wireless communication  
20   devices is executed.

12. A wireless communication device comprising:

      determination means for determining a designated process type; and

      display means for displaying information  
25   associated with a device having a function of the process type determined by said determination means on the basis of signals informed by another devices.

- 41 -

13. A method of controlling a wireless communication device, comprising:

a detection step of detecting beacons at a plurality of frequencies;

5 a search step of searching for a wireless communication device which has a predetermined function, and is present on a network identified by network identification information contained in the beacon detected in the detection step, in accordance with the  
10 network identification information; and

a display step of selectably displaying information associated with the wireless communication device detected in the search step so as to determine a wireless communication partner.

15 14. A method of controlling a wireless communication device, comprising:

a storage step of storing, in a memory, device identification information and network identification information of a partner wireless communication device  
20 which has been connected previously;

a determination step of determining an operator's instruction that instructs one of a history search mode that communicates with a desired partner wireless communication device stored in the memory, and a new  
25 search mode that searches for a partner wireless communication device via a wireless communication, and

communicates with the found partner wireless communication device;

a search step of executing, when the operator instructs the new search mode, a beacon detection  
5 process, comparing network identification information included in the detected beacon with the network identification information stored in the memory, continuing a detection process of another beacon if the two pieces of network identification information match,  
10 and searching for a partner wireless communication device to communicate with based on new network identification information if the new network identification information is detected;

a first display step of selectably displaying one  
15 device identification information found in the search step on a display unit;

a second display step of selectably displaying, when the operator instructs the history search mode, the device identification information stored in the  
20 memory on the display unit; and

a wireless communication establishment process step of executing, when one device identification information displayed in one of the first and second display steps is selected, a wireless communication  
25 establishment process on the basis of the selected device identification information.

- 43 -


15. A method of controlling a wireless communication device, comprising:

a determination step of determining a designated process type; and

5 a display step of displaying information associated with a device having a function of the process type determined in the determination step on the basis of signals informed by another devices on a display unit.


10

FIG. 1

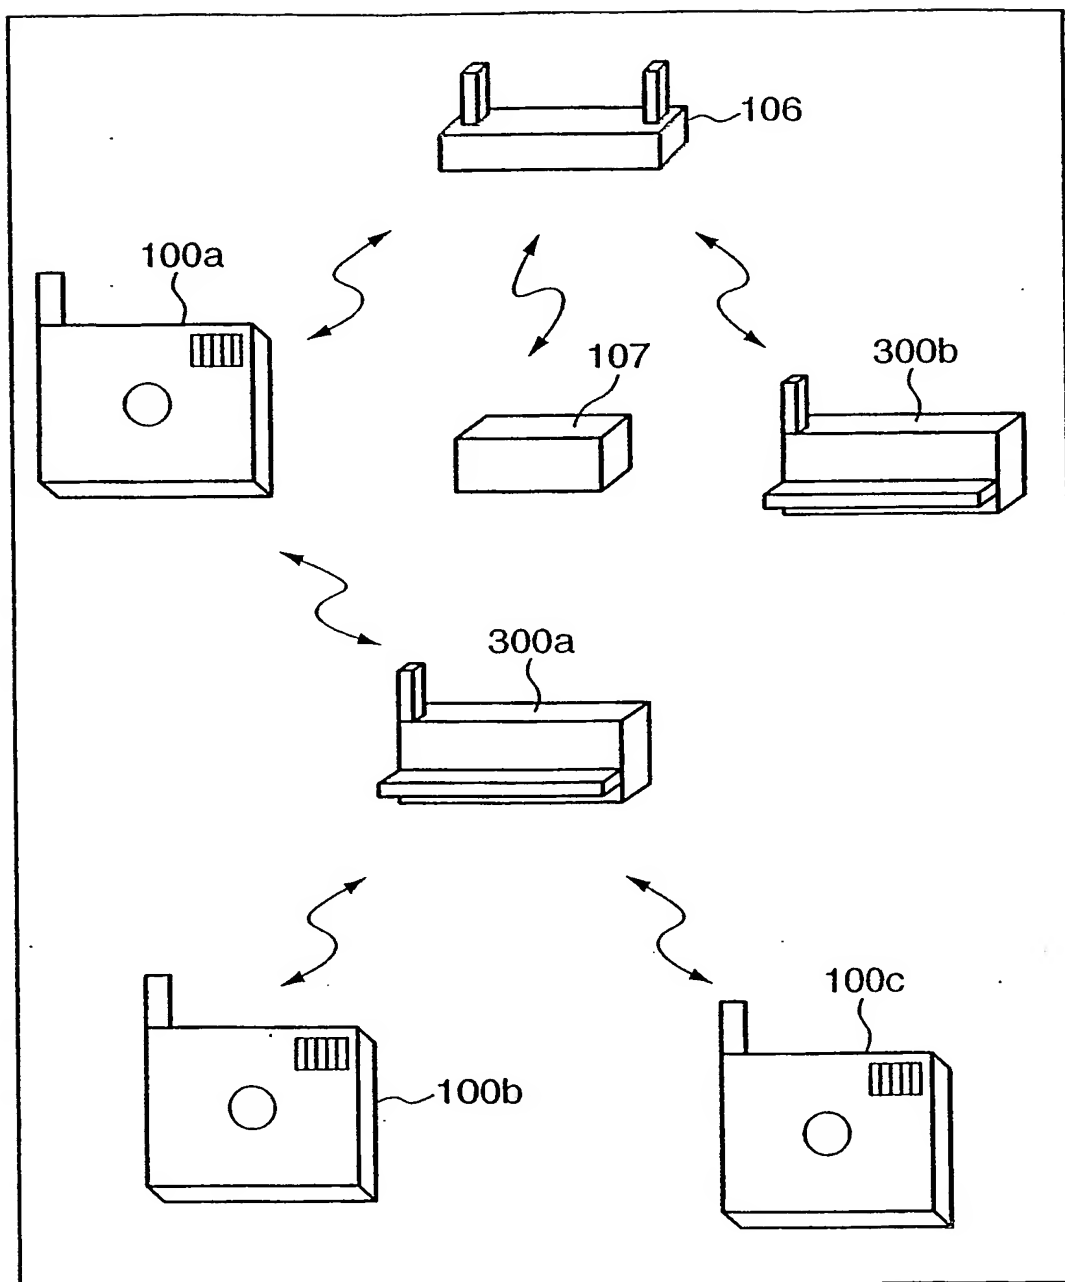


2/22

FIG. 2

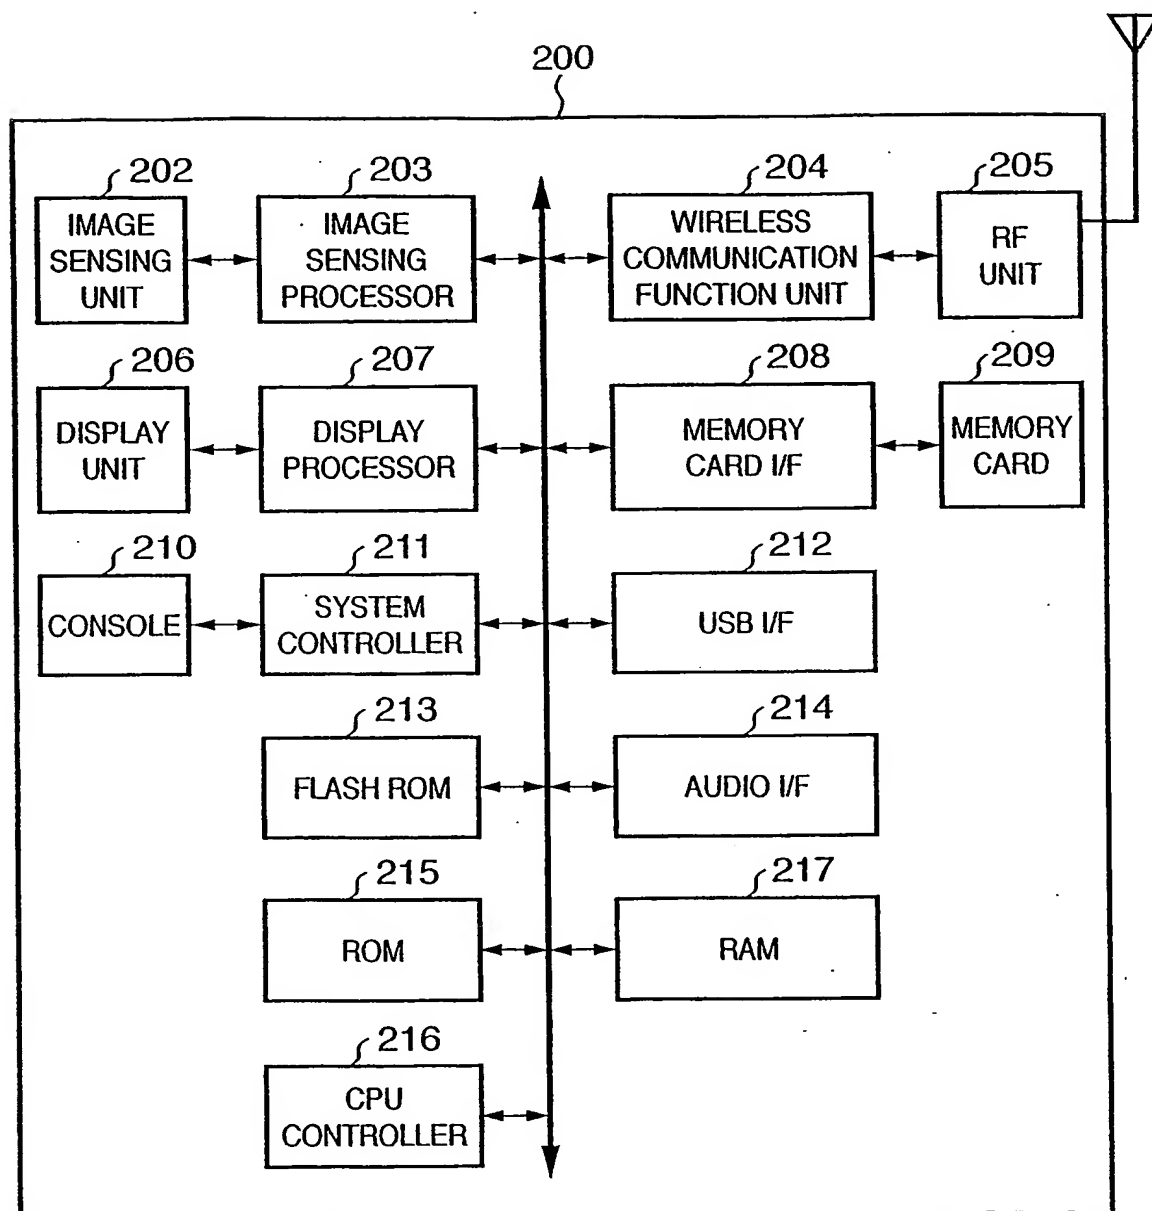

3/22


FIG. 3

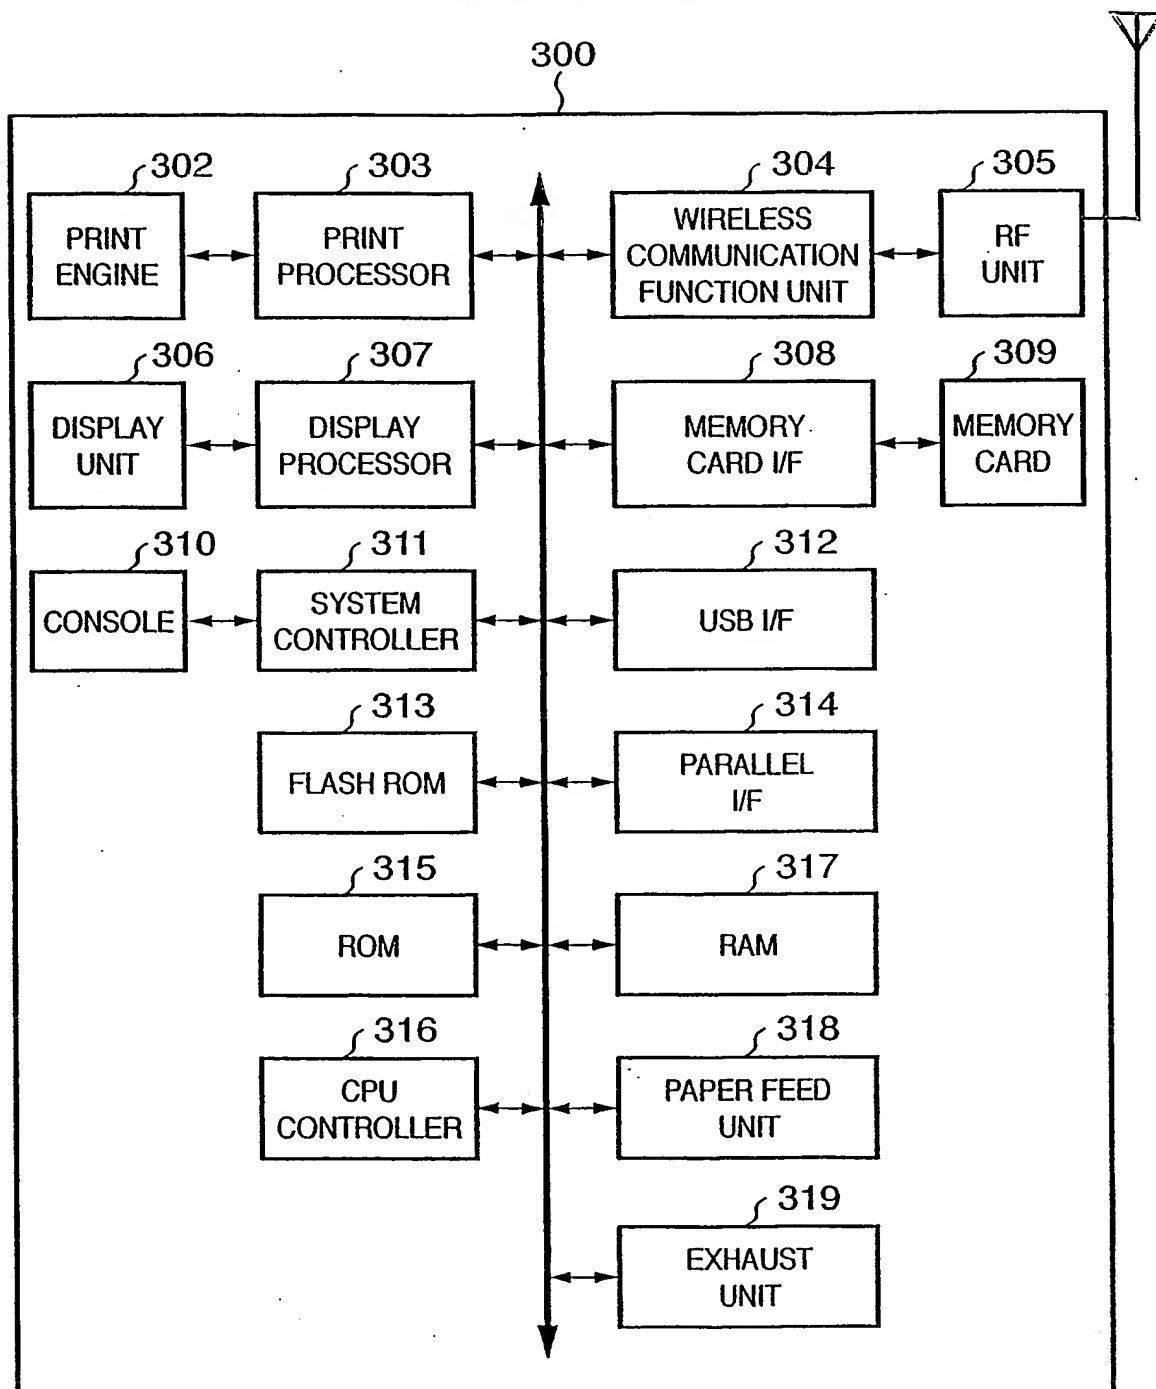




4/22

FIG. 4

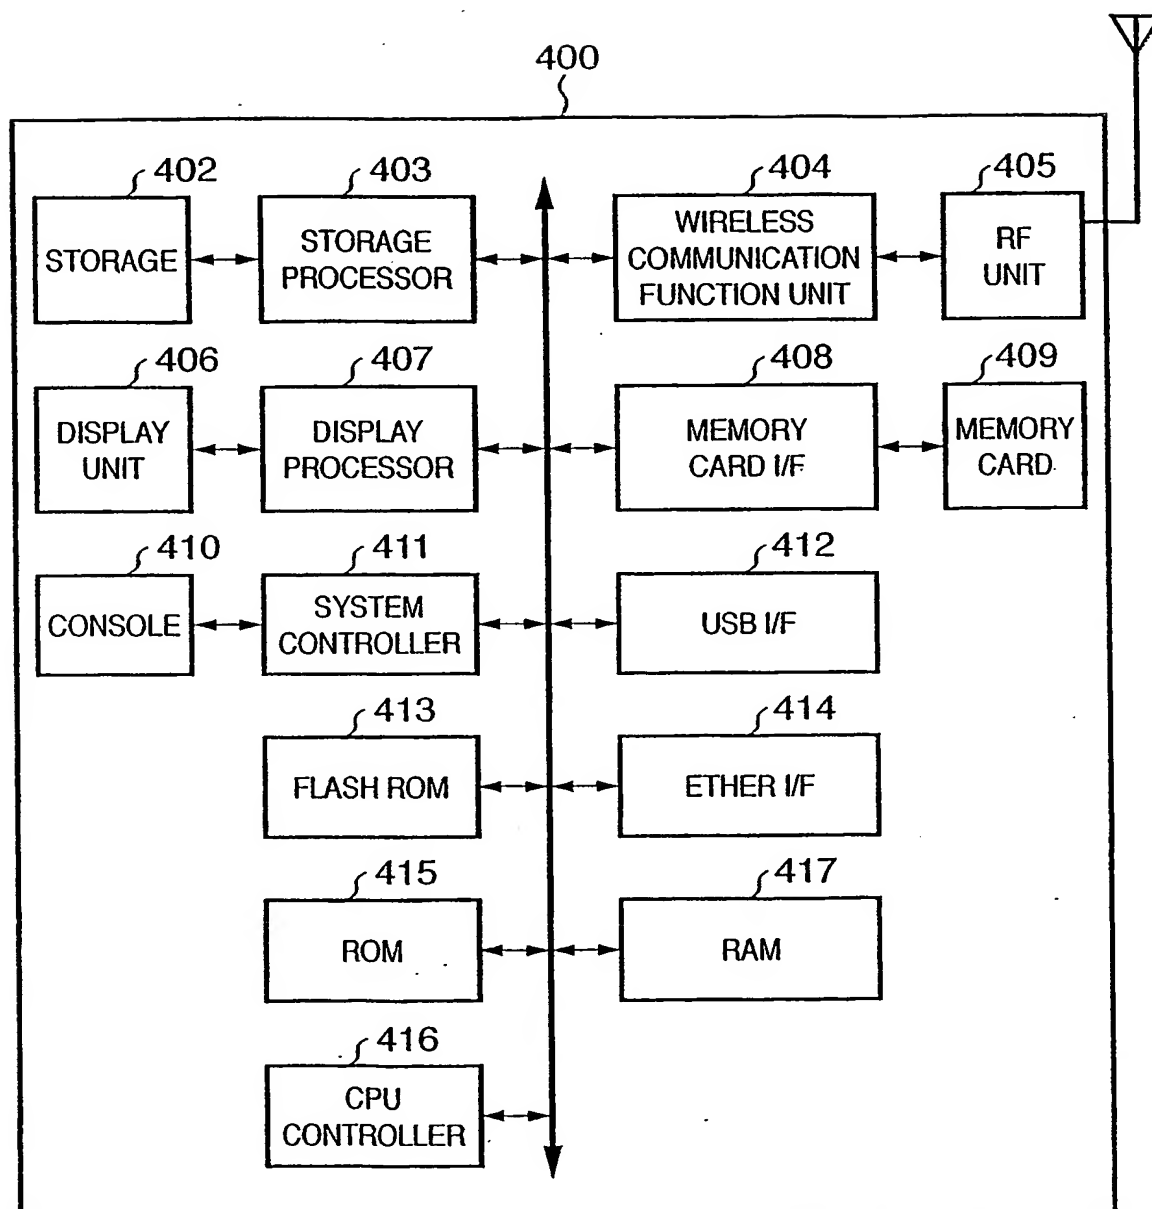


5/22

FIG. 5A

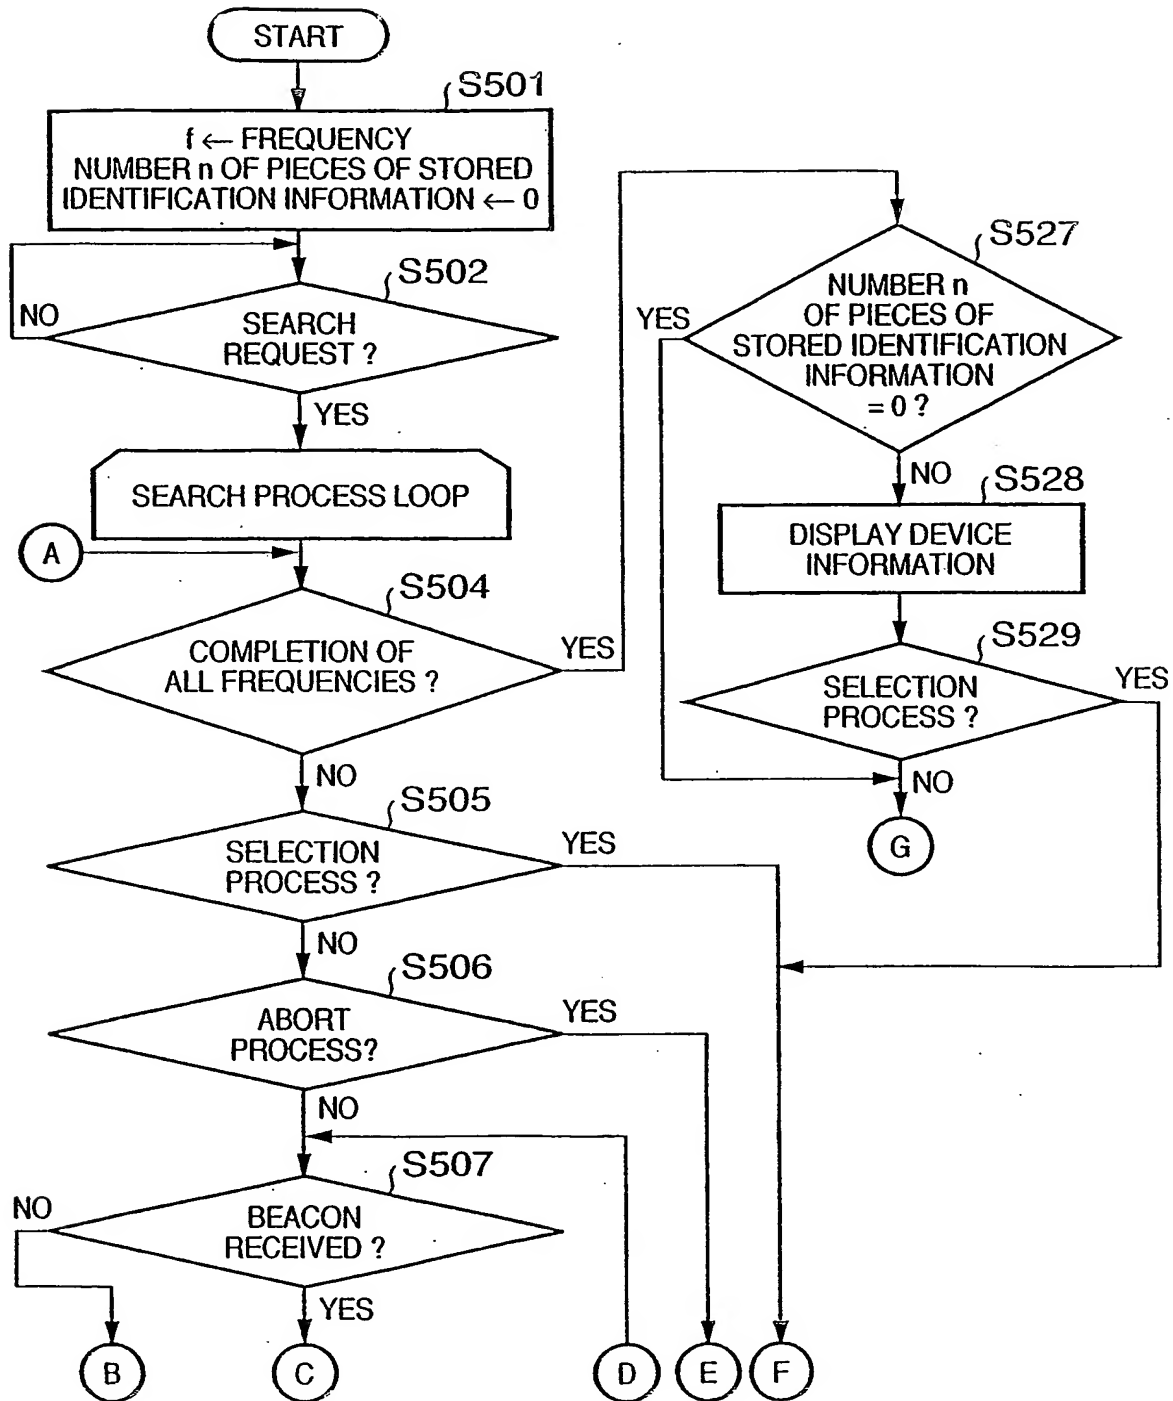


6/22

FIG. 5B

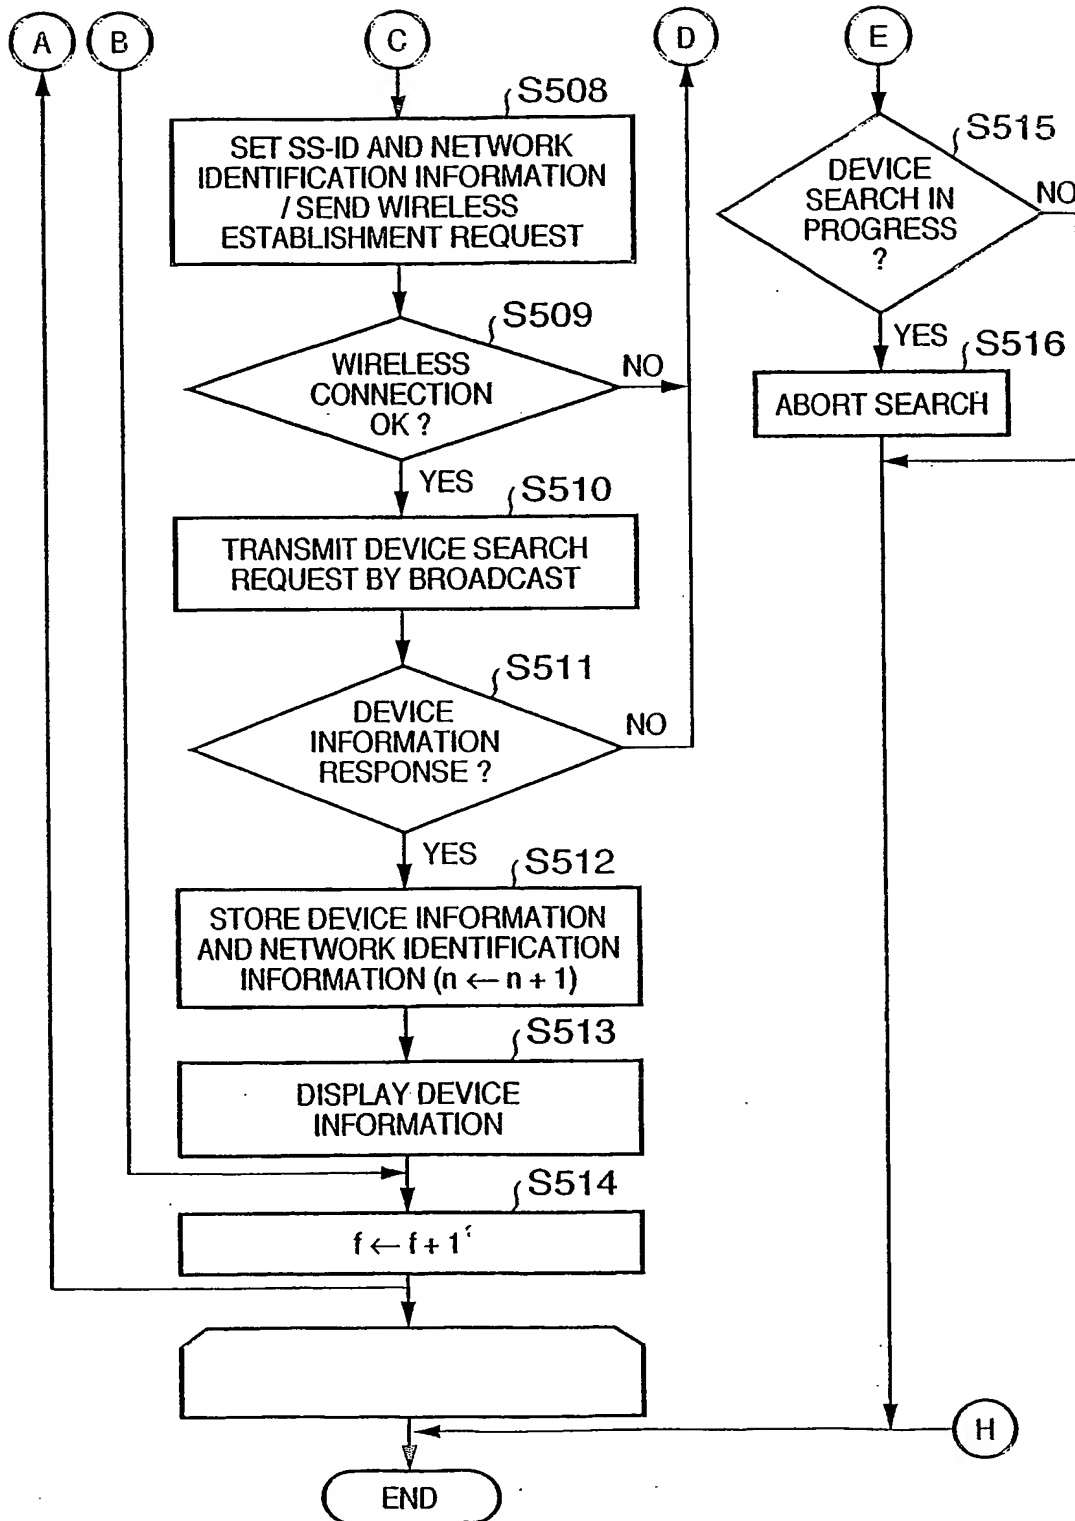

7/22

FIG. 5C

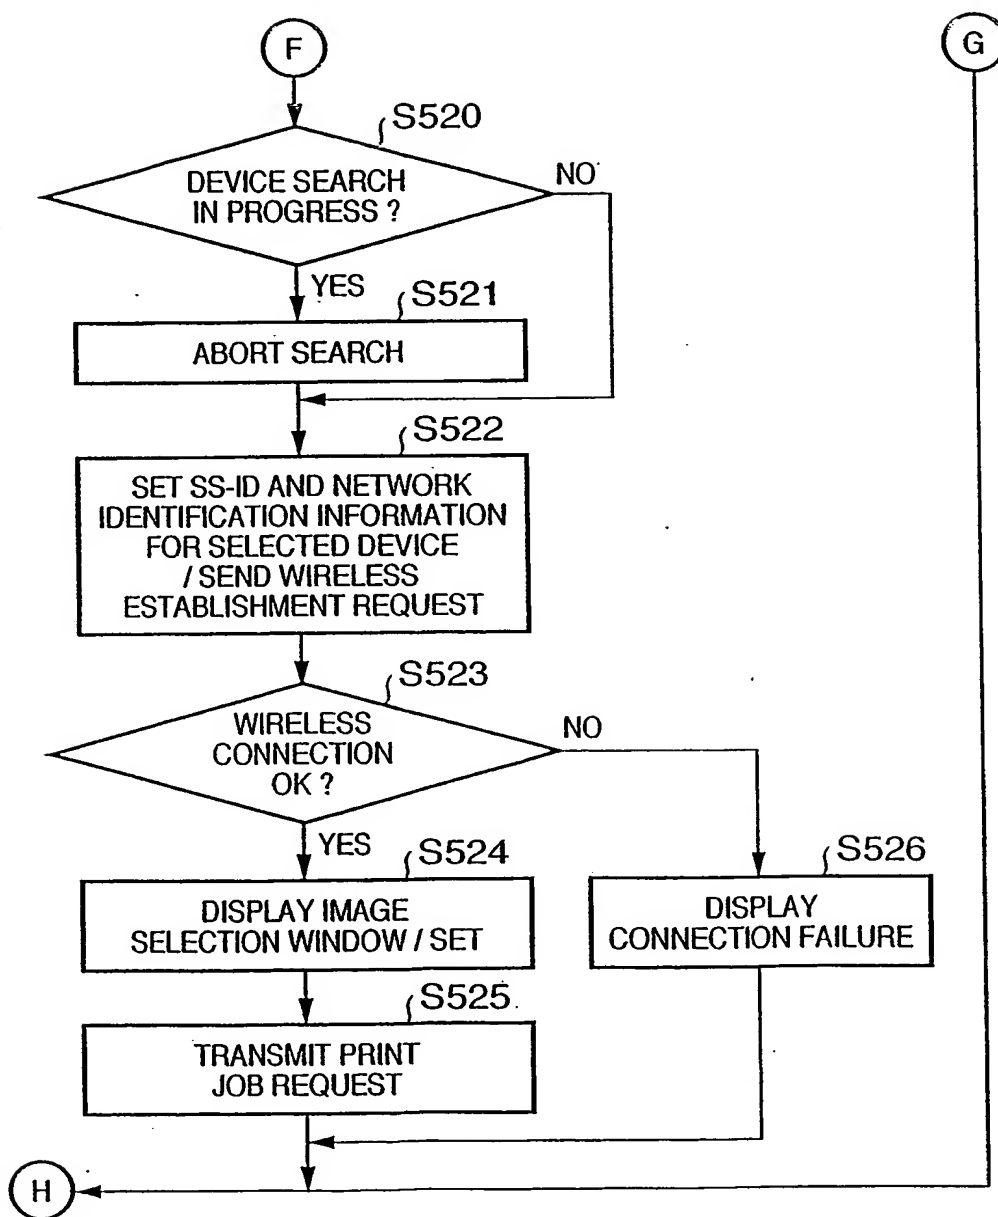

8/22


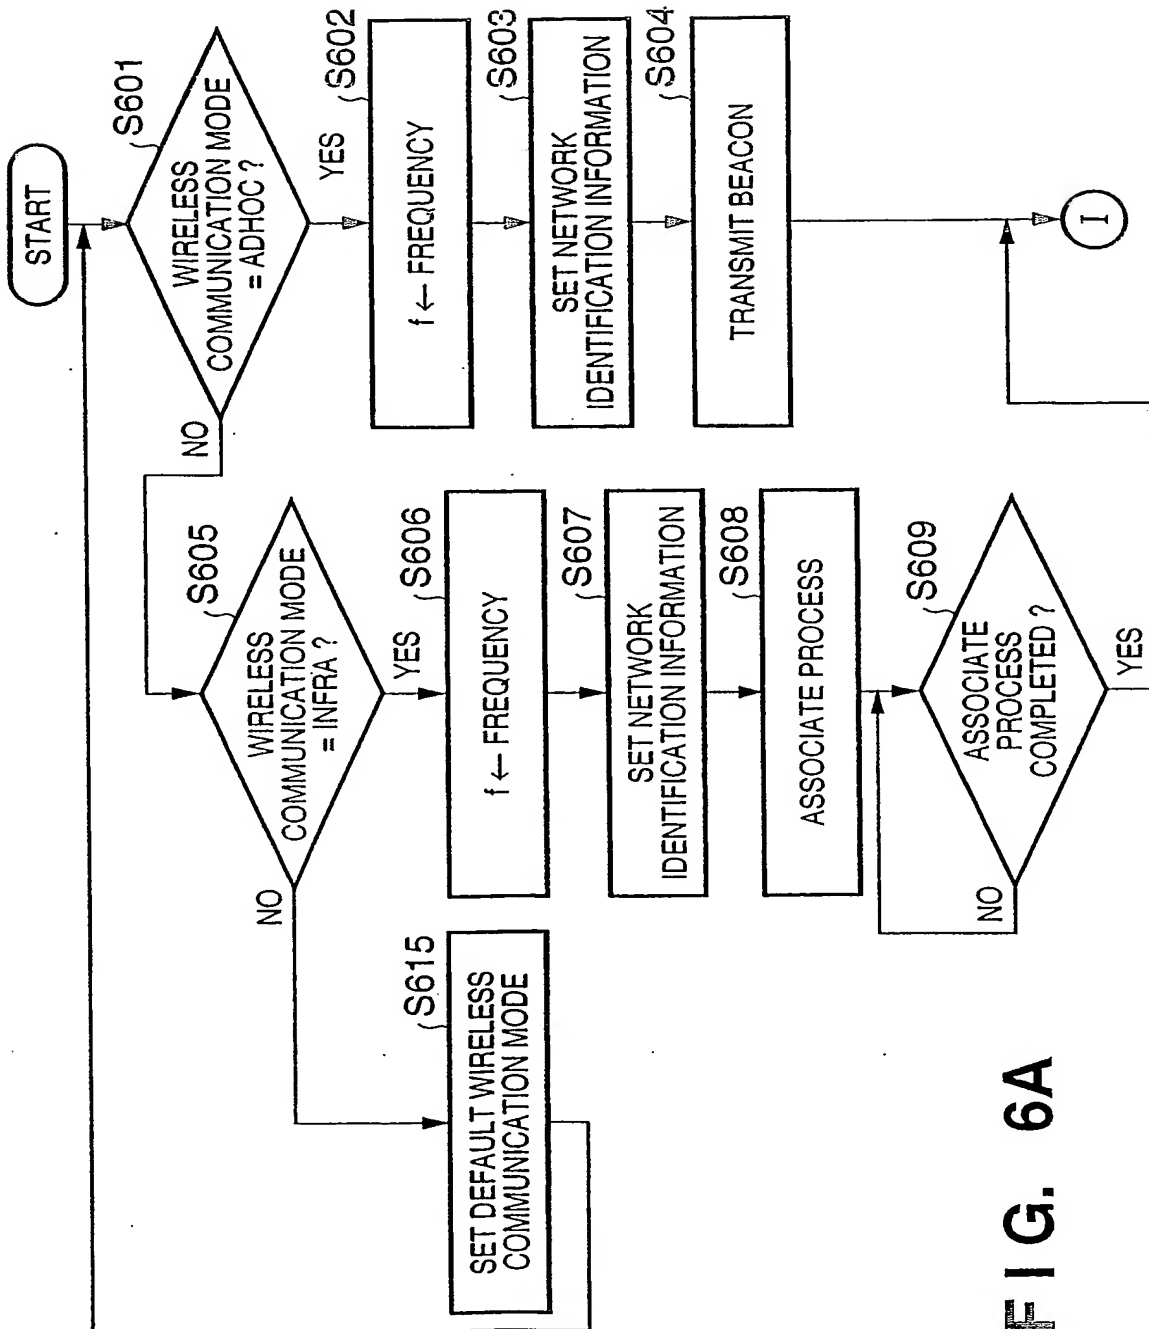


FIG. 6A


9/22

FIG. 6B

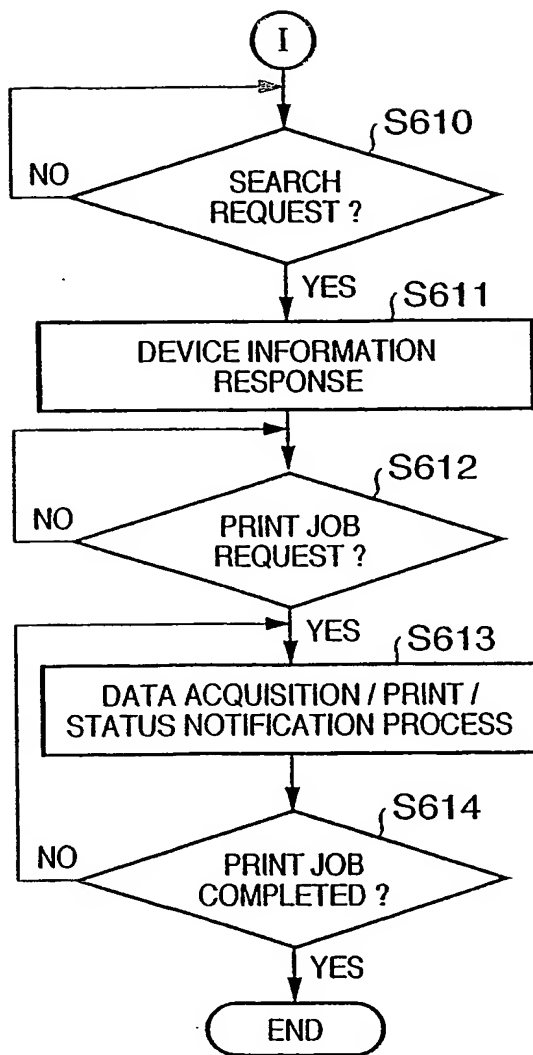


10/22

FIG. 7

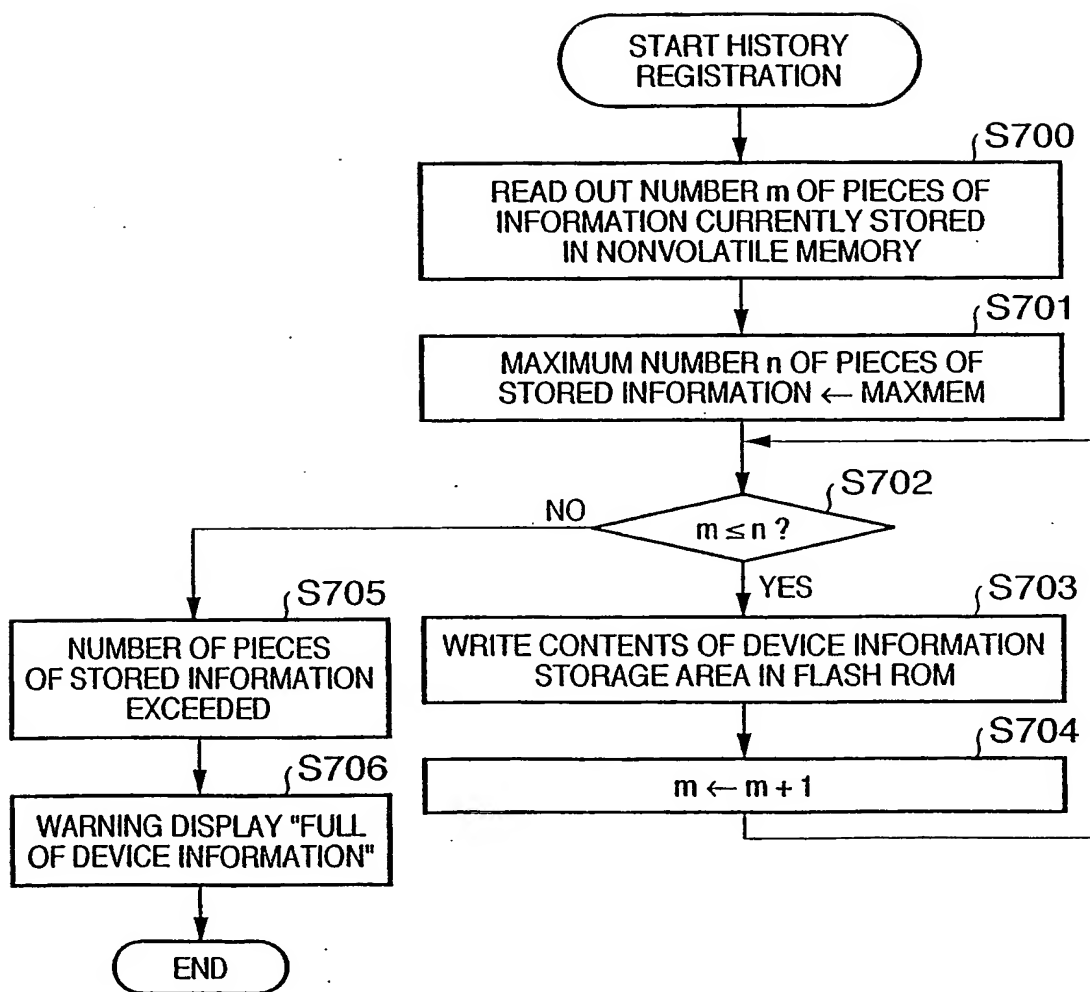

11/22


FIG. 8

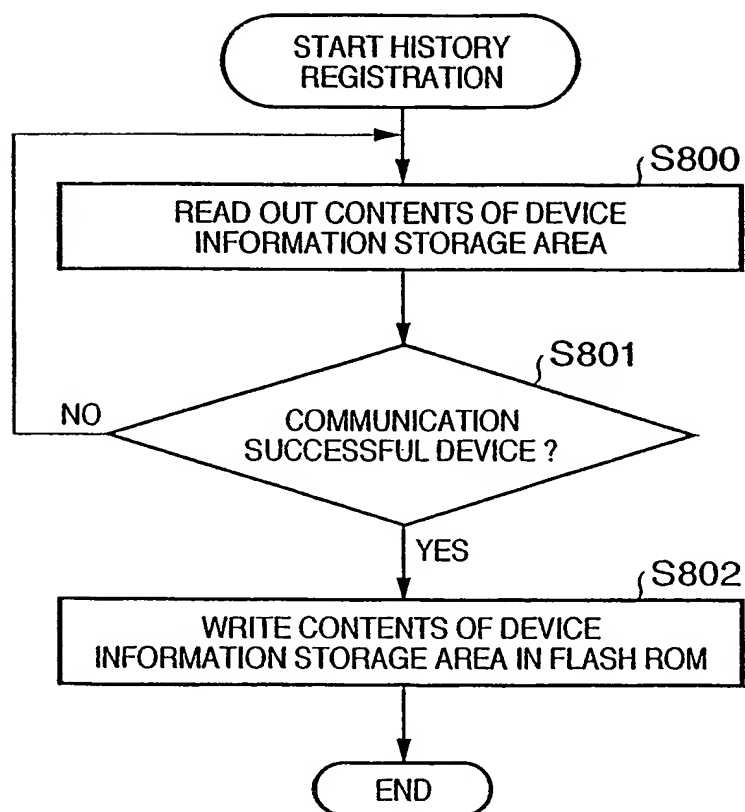




12/22

FIG. 9

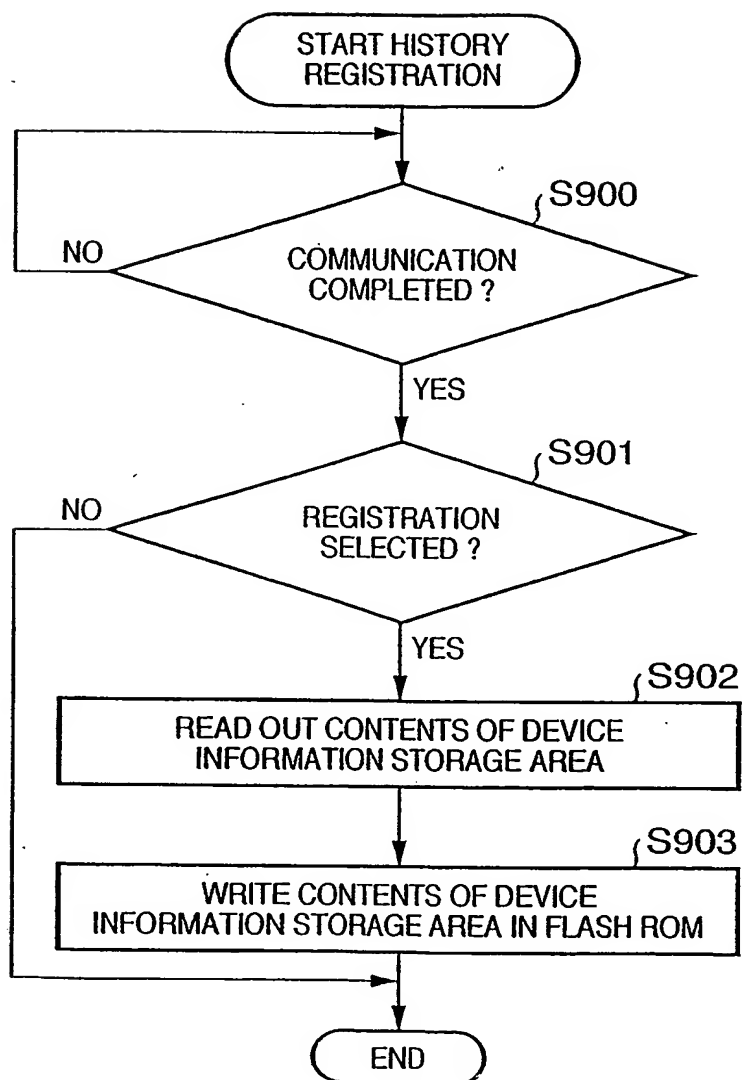


13/22

FIG. 10A

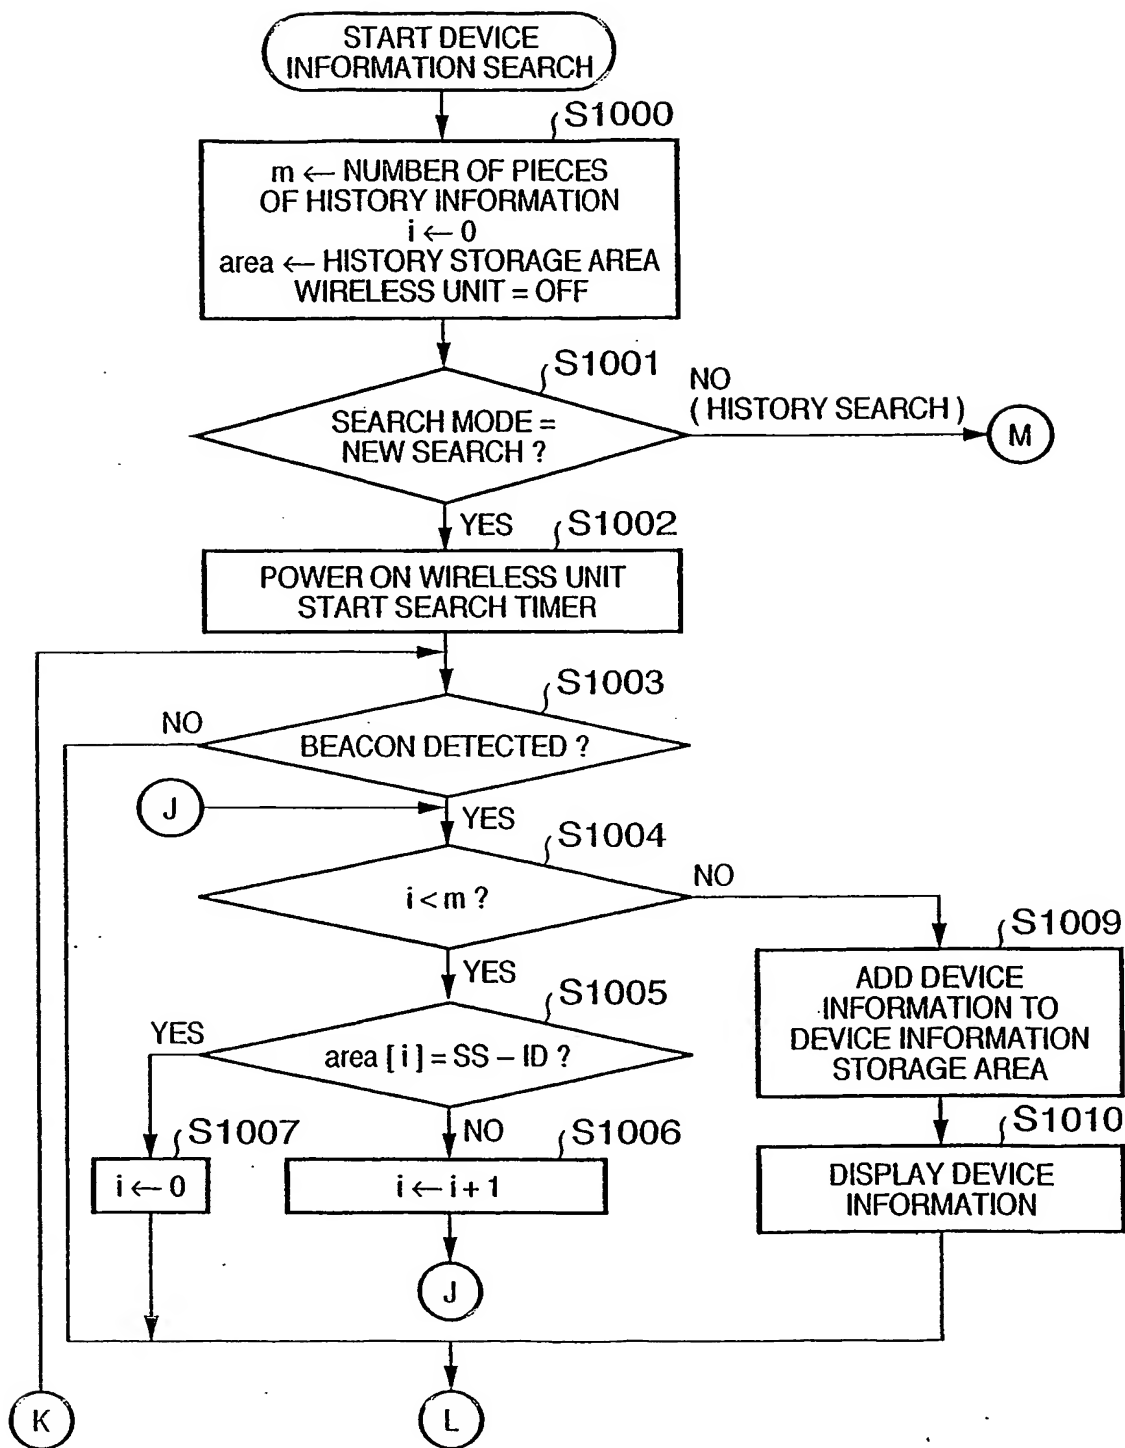


14/22

FIG. 10B

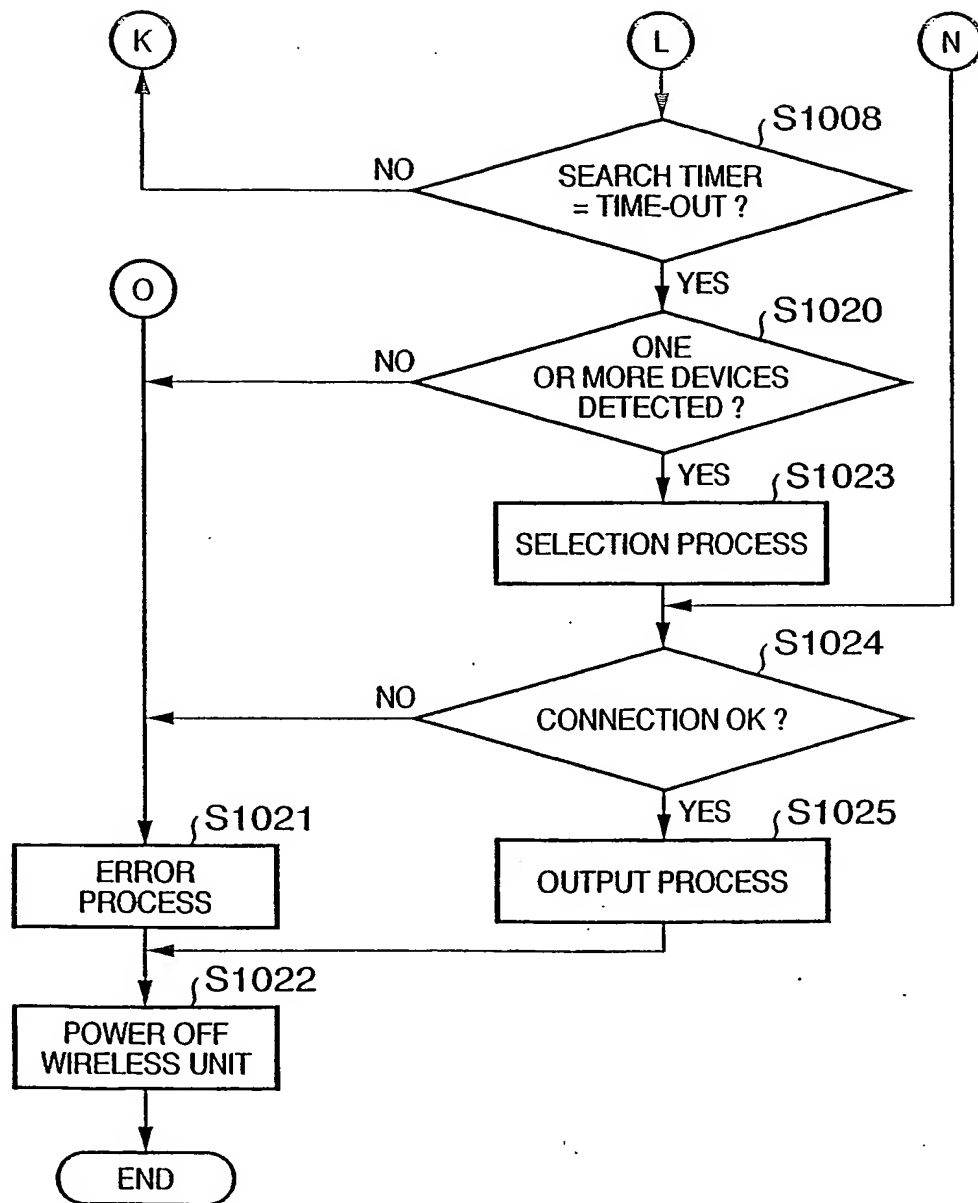


15/22


FIG. 10C

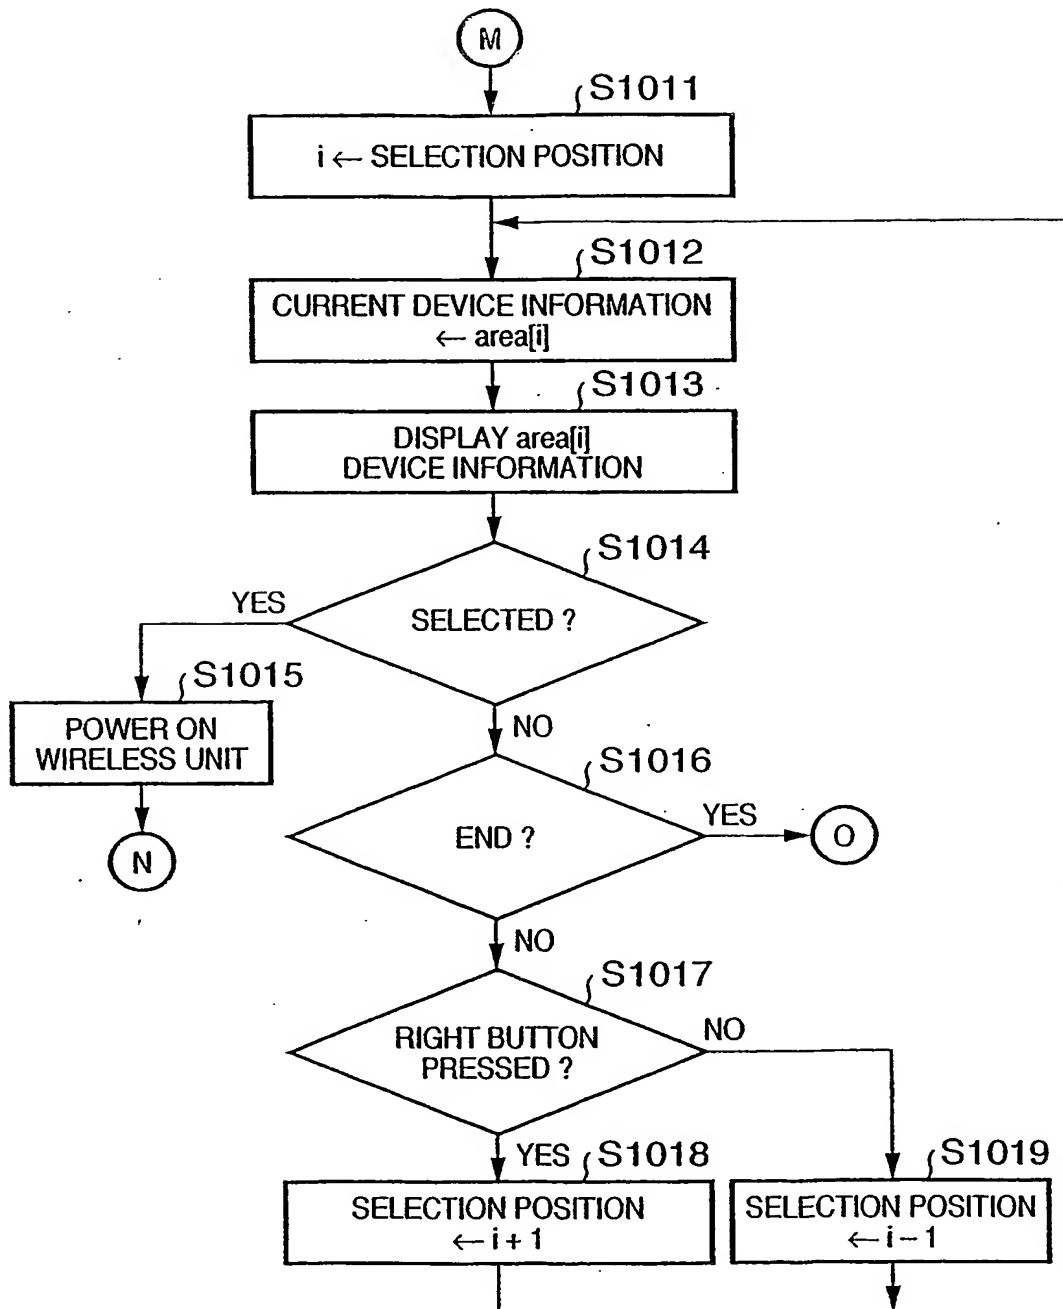


16/22

FIG. 11

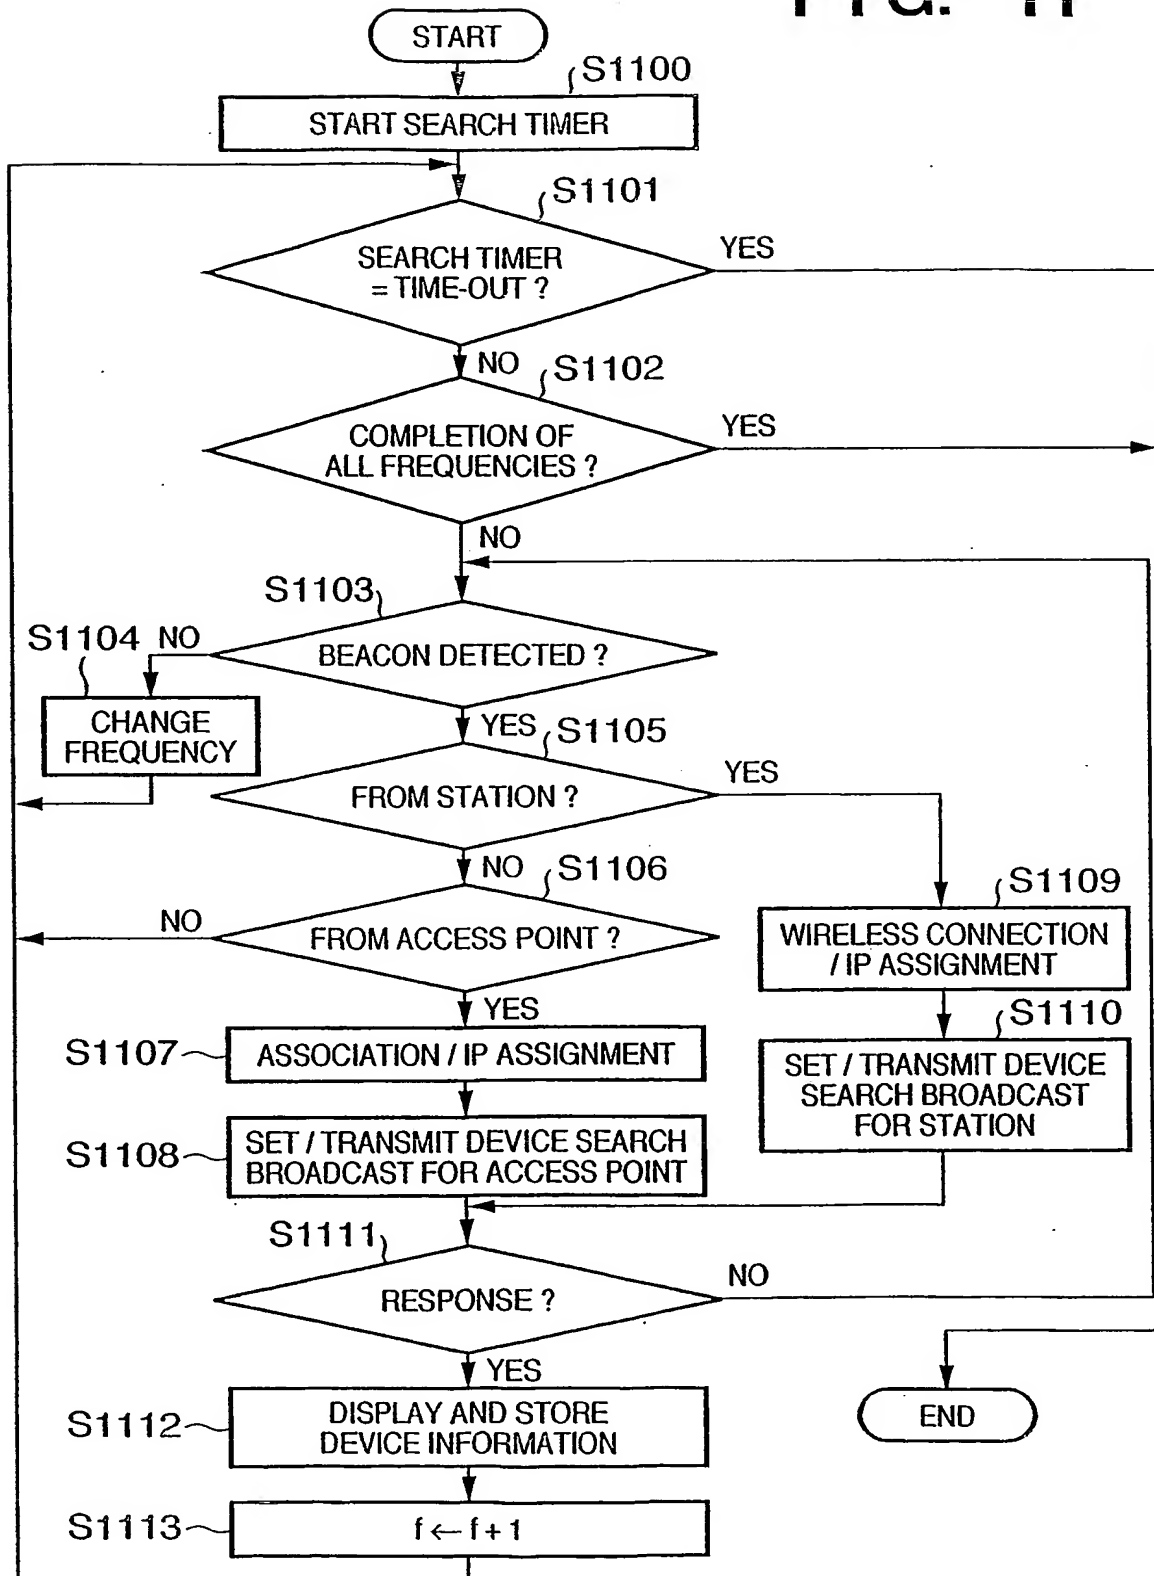


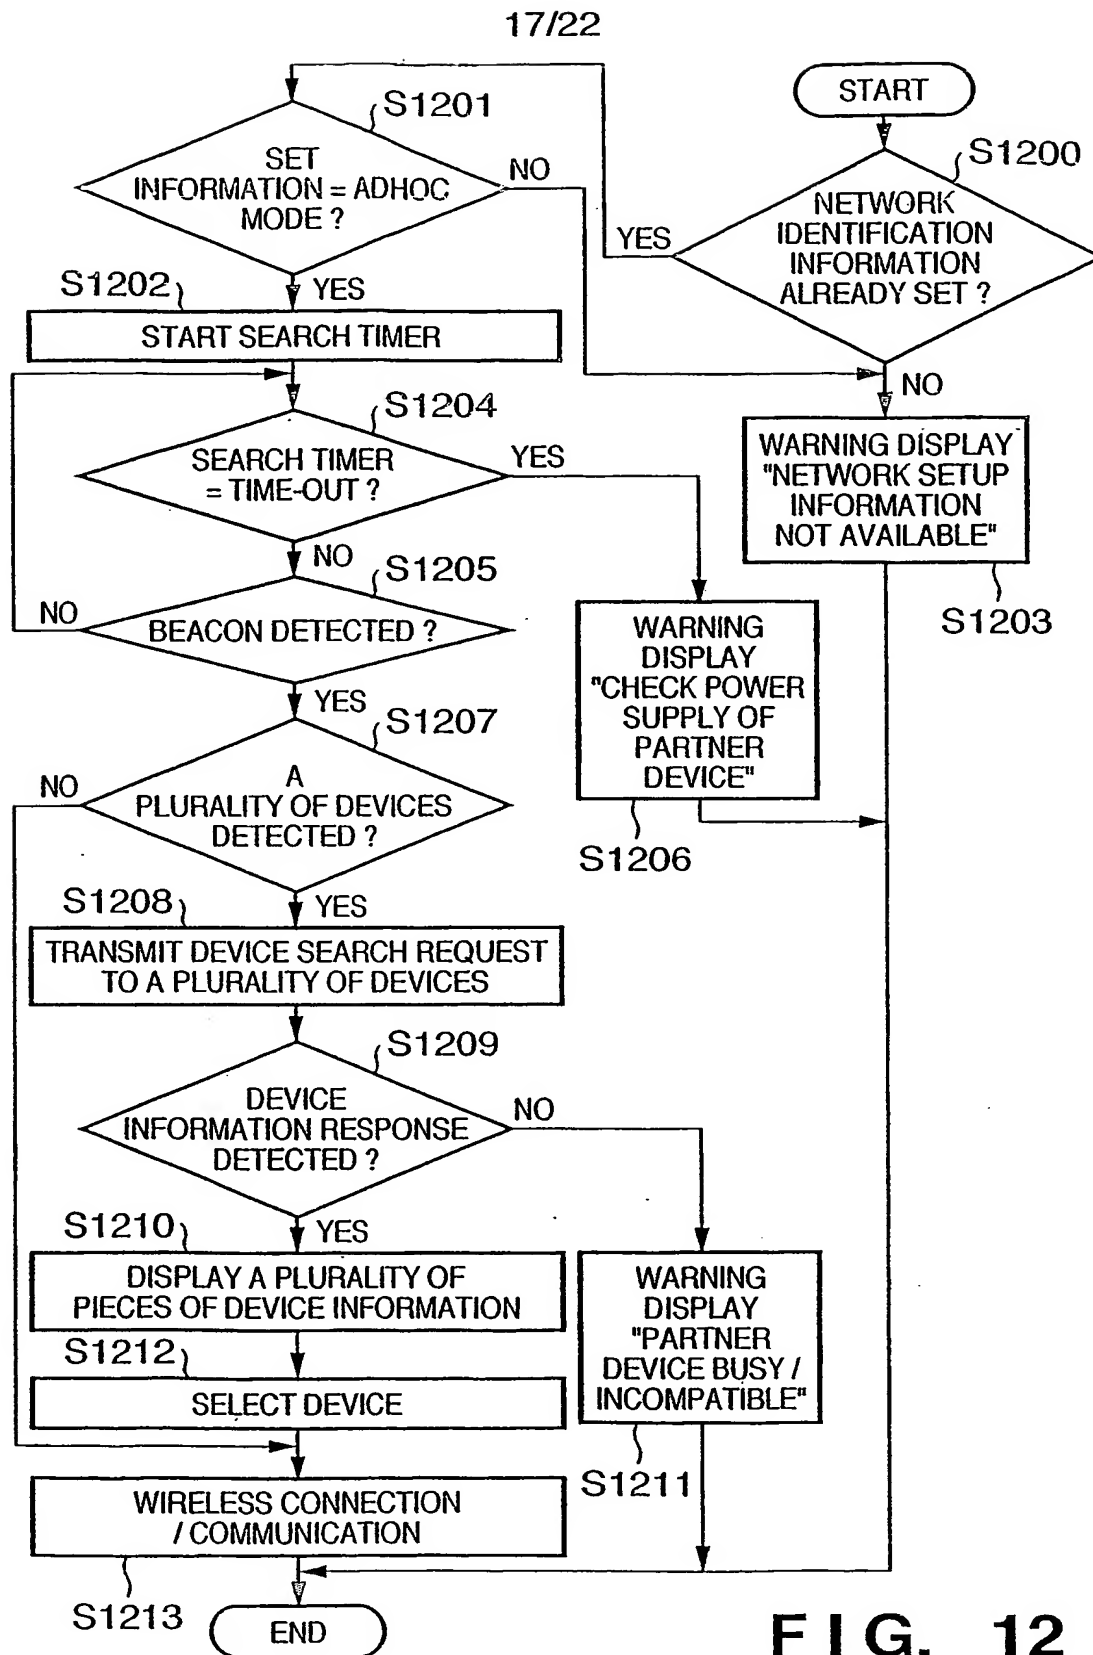

18/22

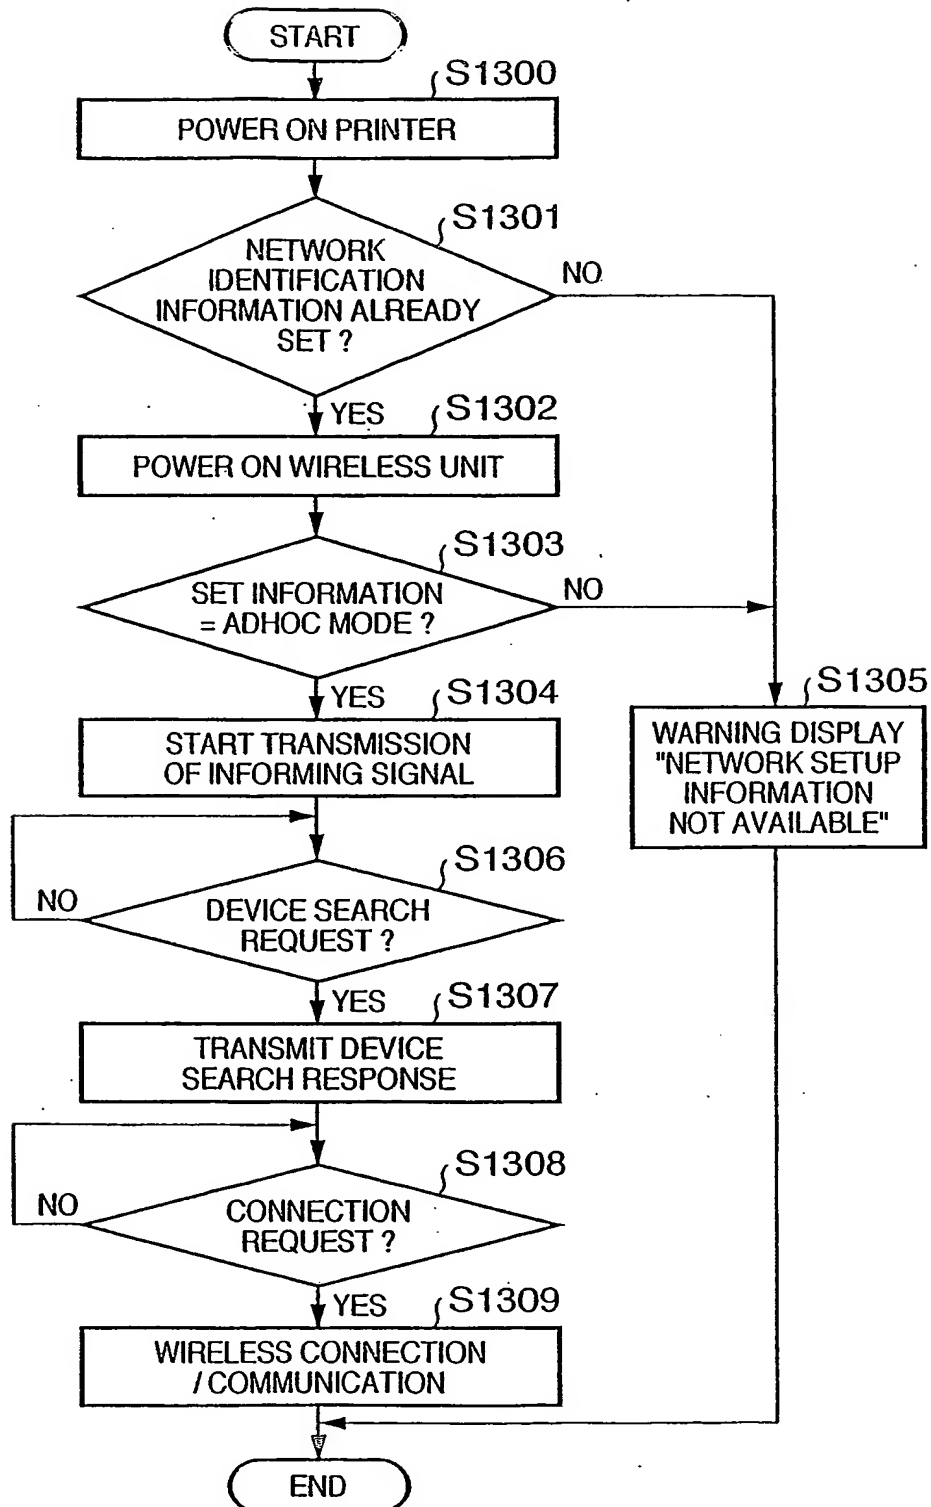**FIG. 13**


19/22

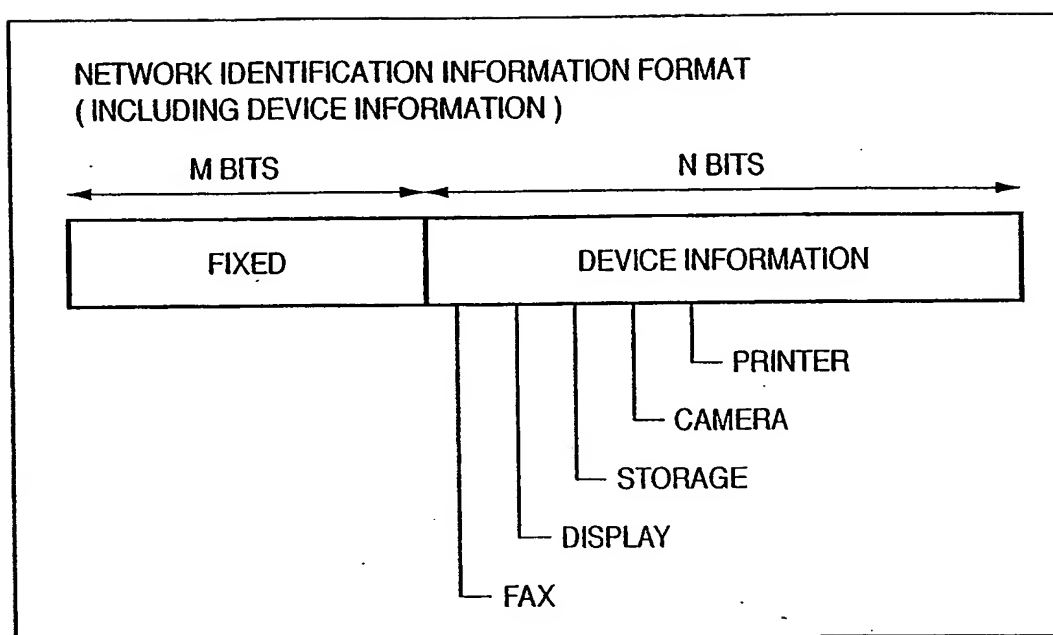**FIG. 14**




20/22

FIG. 15

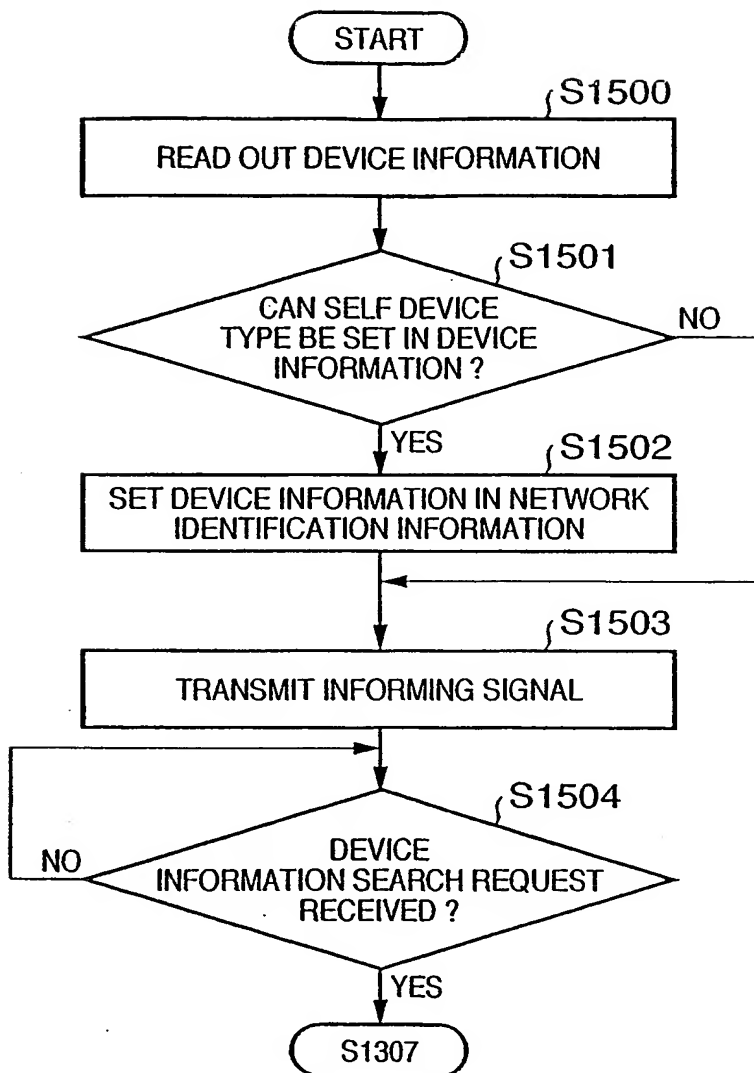


21/22

FIG. 16

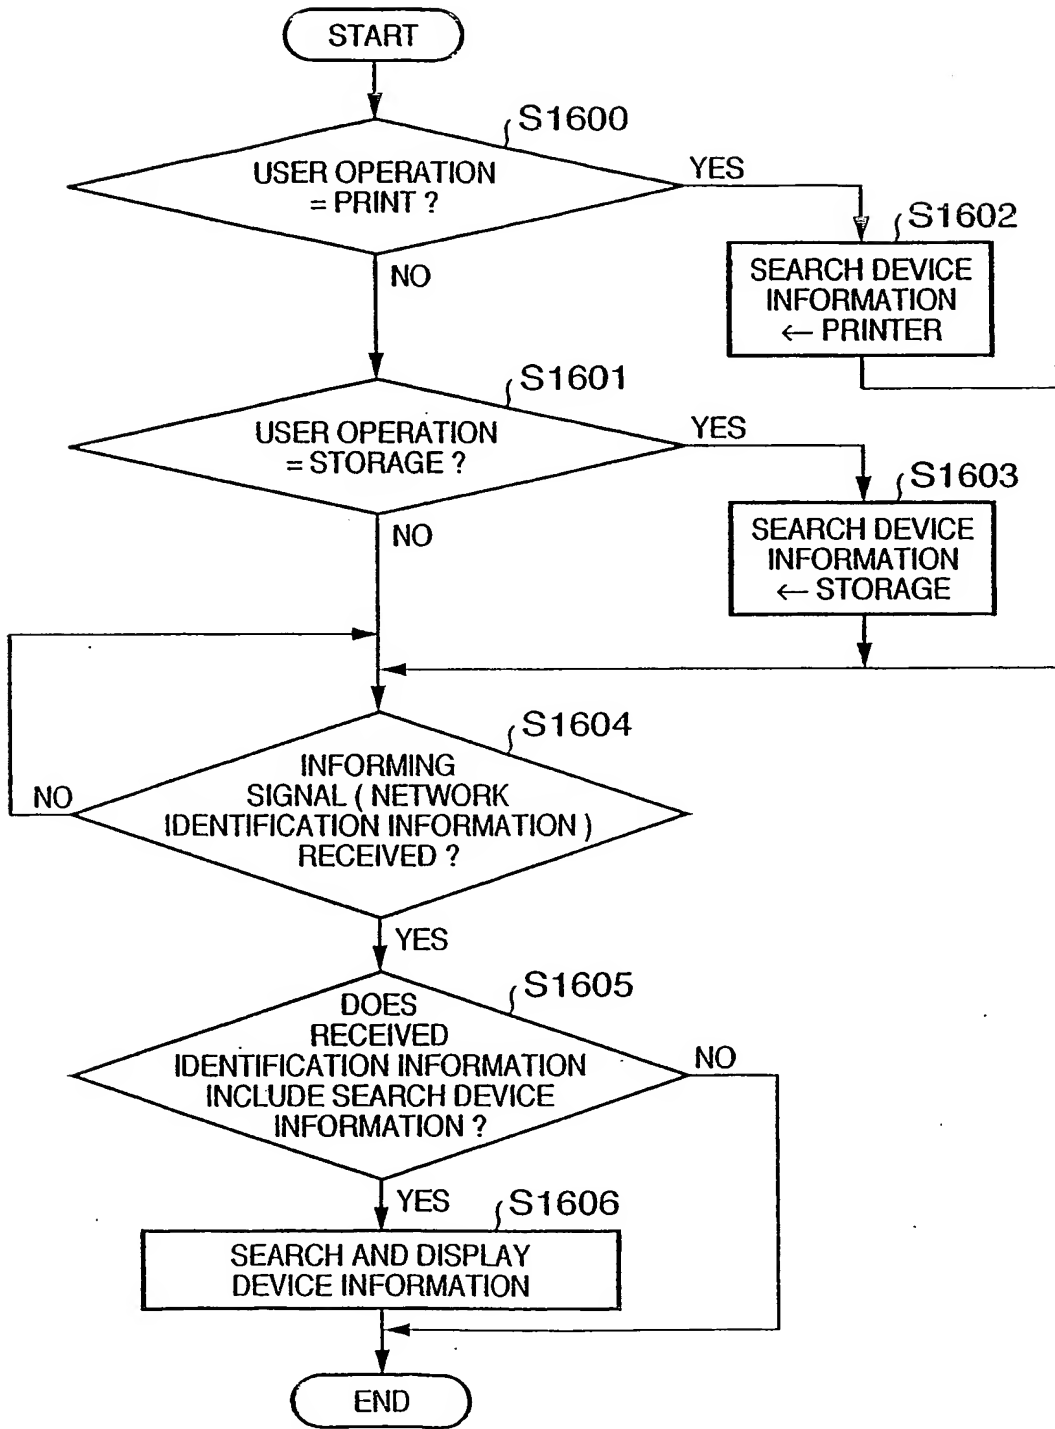

22/22

FIG. 17

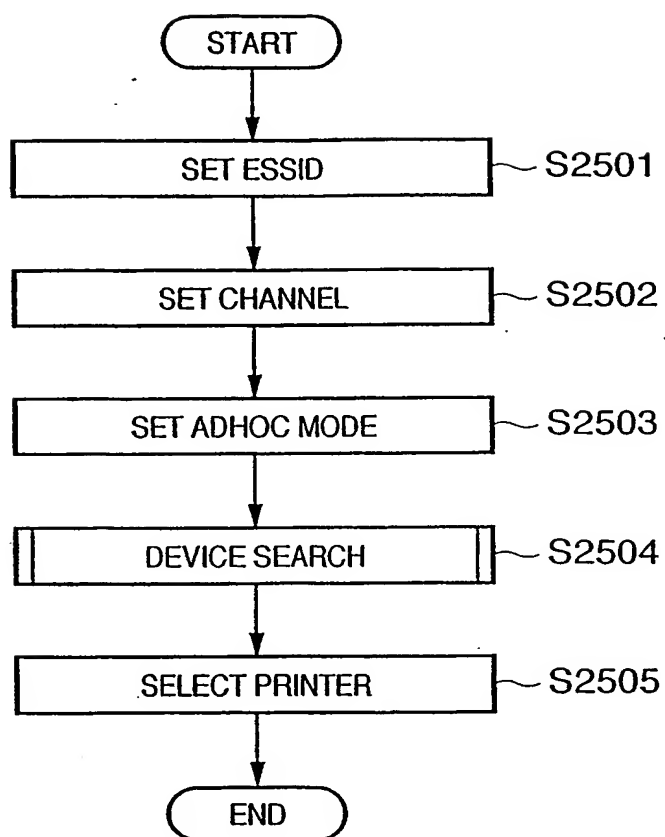

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP 2004/005600

| <b>A. CLASSIFICATION OF SUBJECT MATTER</b>   |   |  |
|--|---|--|
| Int.Cl. <sup>7</sup> H04L12/28, G06F3/12   |   |  |
| According to International Patent Classification (IPC) or to both national classification and IPC  |   |  |
| <b>B. FIELDS SEARCHED</b>  |   |  |
| Minimum documentation searched (classification system followed by classification symbols)  |   |  |
| Int.Cl. <sup>7</sup> H04L12/28, G06F3/12   |   |  |
| Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched<br>Japanese Utility Model Gazette 1922-1996, Japanese Publication of Unexamined Utility Model Applications 1971-2004, Japanese Registered Utility Model Gazette 1994-2004, Japanese Gazette Containing the Utility Model 1996-2004   |   |  |
| Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)   |   |  |
| <b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>  |   |  |
| Category*  | Citation of document, with indication, where appropriate, of the relevant passages                                  | Relevant to claim No.                              |
| Y  | JP 2002-244829 A (KABUSHIKI KAISHA RICOH)<br>2002.08.30, [0037] - [0047], FIG. 2, FIG. 3                            | 1-4, 6, 13   |
| A  | (Family: none)  | 5, 7-12, 14, 15                                    |
| Y  | JP 2003-091467 A<br>(INTERNATIONAL BUSINESS MACHINES CORPORATION)<br>2003.03.28, [0049]<br>& US 2004/0003060 A1     | 1-4, 6, 13   |
| Y  | JP 2002-094604 A (CANON KABUSHIKI KAISHA)<br>2002.03.29, [0083], FIG. 12<br>& US 2002/0032748 A1 & JP 2004-110844 A | 1-4, 6, 13   |
| <input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.  |   |  |
| * Special categories of cited documents:<br>"A" document defining the general state of the art which is not considered to be of particular relevance<br>"E" earlier application or patent but published on or after the international filing date<br>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)<br>"O" document referring to an oral disclosure, use, exhibition or other means<br>"P" document published prior to the international filing date but later than the priority date claimed<br>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention<br>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone<br>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art<br>"&" document member of the same patent family |   |  |
| Date of the actual completion of the international search  |   | Date of mailing of the international search report |
| 08.06.2004   |   | 20.7.2004  |
| Name and mailing address of the ISA/JP   |   | Authorized officer                                 |
| Japan Patent Office  |   | TUTOMU NAKAKI                                      |
| 3-4-3, Kasumigaseki, Chiyoda-ku, Tokyo 100-8915, Japan   |   | 5X 9299  |
|  |   | Telephone No. +81-3-3581-1101 Ext. 3596            |